



# Threading & Grooving Tools


INCH

<b>CONTENTS</b>	<b>PAGE</b>
INSERTS ORDERING CODE .....	1
PARTIAL PROFILES .....	2-5
ISO METRIC .....	6-11
AMERICAN UN .....	12-18
WHITWORTH.....	19-24
PG .....	25
BSPT .....	26-27
NPT .....	28-29
NPTF.....	30-31
TRAPEZ .....	32-33
ACME .....	34-35
STUB ACME .....	36-37
AM. BUTTRESS .....	38-39
UNJ .....	40-41
RD (DIN 405, 20400) .....	42-43
MJ, SAGENGWINDE .....	44-45
API (OIL INDUSTRY).....	46-50
SPECIAL PROFILE .....	51
GROOVING .....	52-53
TOOLHOLDERS .....	54-56
TECHNICAL SECTION .....	57-72



EROJET is cutting tools manufacturer of threading and grooving tools. EROJET has a capability of manufacturing high quality cutting tools and at the same time offering delivery, and outstanding customer service. In addition to our extensive line of standard tools, we also manufacture a wide range of special tools according to customer specifications. The company is certified according to ISO 9001: 2000.

## INSERTS ORDERING CODE

ISO	1.5	MULTITOOTH	ER	16	V	K420C																																				
<b>PROFILE</b>  <b>Partial Profile</b> 60° 55°  <b>Full Profile</b> ISO METRIC UN WHITWORTH BSPT MJ NPT NPTF TRAPEZ ACME STUB ACME AM. BUTTRESS ROUND (DIN 405) DIN 20400 PG SAGENGWINDE UNJ API API ROUND BUT. CASING EXTREME LINE	<b>PITCH</b>  <b>Partial Profile</b> <table border="1" style="width: 100%;"> <thead> <tr> <th></th> <th>mm</th> <th>tpi</th> </tr> </thead> <tbody> <tr> <td>A</td> <td>0.5-1.5</td> <td>48-16</td> </tr> <tr> <td>G</td> <td>1.75-3.0</td> <td>14-8</td> </tr> <tr> <td>AG</td> <td>0.5-3.0</td> <td>48-8</td> </tr> <tr> <td>N</td> <td>3.5-5.0</td> <td>7-5</td> </tr> <tr> <td>Q</td> <td>5.5-6.0</td> <td>4.5-4</td> </tr> </tbody> </table> <b>Full Profile</b> <table border="1" style="width: 100%;"> <thead> <tr> <th>mm</th> <th>tpi</th> </tr> </thead> <tbody> <tr> <td>0.35-6.0</td> <td>72-4</td> </tr> </tbody> </table>		mm	tpi	A	0.5-1.5	48-16	G	1.75-3.0	14-8	AG	0.5-3.0	48-8	N	3.5-5.0	7-5	Q	5.5-6.0	4.5-4	mm	tpi	0.35-6.0	72-4	2M 3M	<b>TYPE OF INSERT</b>  ER= EX. R.H. EL= EX. L.H.  IR= IN. R.H. IL = IN. L.H.	<b>INSERT SIZE</b>  <table border="1" style="width: 100%;"> <thead> <tr> <th>L</th> <th>I.C.</th> </tr> </thead> <tbody> <tr> <td>06</td> <td>5/32</td> </tr> <tr> <td>08</td> <td>3/16</td> </tr> <tr> <td>11</td> <td>1/4</td> </tr> <tr> <td>16</td> <td>3/8</td> </tr> <tr> <td>22</td> <td>1/2</td> </tr> <tr> <td>27</td> <td>5/8</td> </tr> </tbody> </table>	L	I.C.	06	5/32	08	3/16	11	1/4	16	3/8	22	1/2	27	5/8	V  V E R T I C A L	<b>CARBIDE GRADES</b>  K420C K325C K205C K200
	mm	tpi																																								
A	0.5-1.5	48-16																																								
G	1.75-3.0	14-8																																								
AG	0.5-3.0	48-8																																								
N	3.5-5.0	7-5																																								
Q	5.5-6.0	4.5-4																																								
mm	tpi																																									
0.35-6.0	72-4																																									
L	I.C.																																									
06	5/32																																									
08	3/16																																									
11	1/4																																									
16	3/8																																									
22	1/2																																									
27	5/8																																									

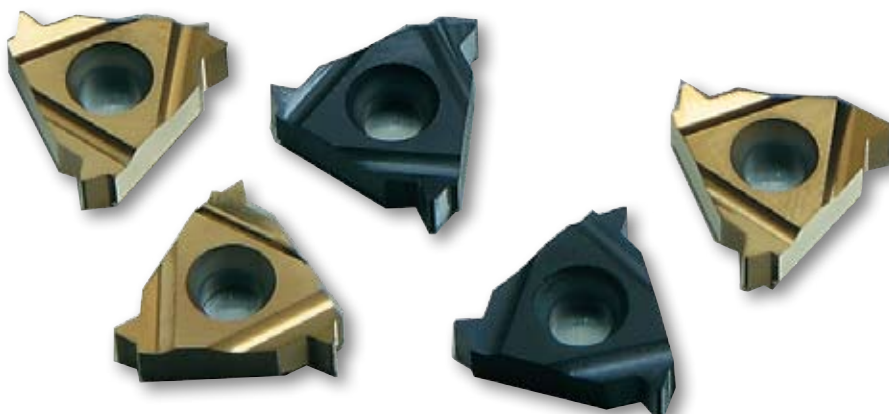

## PARTIAL PROFILE 60° EXTERNAL

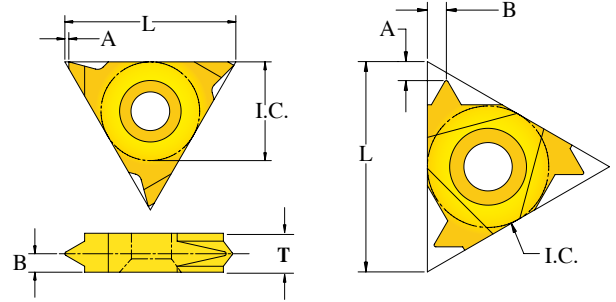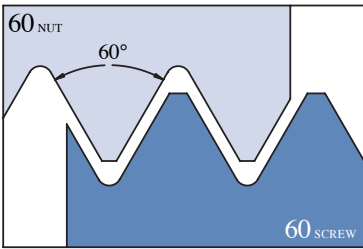

VERTICAL

STANDARD



### STANDARD

PITCH RANGE		CATALOG NUMBER		DIMENSIONS			
MM	TPI	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
0.5-1.5	48-16	A60 ER11	A60 EL11	11	1/4	.03	.04
0.5-1.5	48-16	A60 ER16	A60 EL16	16	3/8	.03	.04
1.75-3.0	14-8	G60 ER16	G60 EL16			.05	.07
0.5-3.0	48-8	AG60 ER16	AG60 EL16	22	1/2	.05	.07
3.5-5.0	7-5	N60 ER22	N60 EL22			.07	.10
5.5-6.0	4.5-4	Q60 ER27	Q60 EL27	27	5/8	.08	.12

### VERTICAL INSERTS

PITCH RANGE		CATALOG NUMBER	DIMENSIONS				
MM	TPI	RIGHT HAND	L mm	I.C.	A	B	T
0.5-1.5	48-16	A60 ER16V	16	3/8	.04	.04	.14
1.75-3.0	14-8	G60 ER16V			.04	.07	.14
0.5-3.0	48-8	AG60 ER16V			.04	.07	.14

## PARTIAL PROFILE 60° INTERNAL

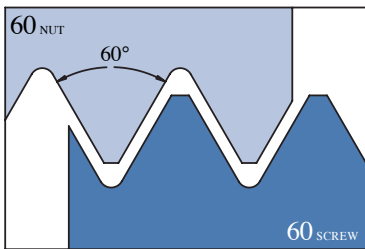



PITCH RANGE		CATALOG NUMBER		DIMENSIONS			
MM	TPI	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
0.5-1.25	48-20	A60 IR06	A60 IL06	06	5/32	.02	.02
0.5-1.5	48-16	A60 IR08	A60 IL08	08	3/16	.02	.03
0.5-1.5	48-16	A60 IR11	A60 IL11	11	1/4	.03	.04
0.5-1.5	48-16	A60 IR16	A60 IL16	16	3/8	.03	.04
1.75-3.0	14-8	G60 IR16	G60 IL16			.05	.07
0.5-3.0	48-8	AG60 IR16	AG60 IL16			.05	.07
3.5-5.0	7-5	N60 IR22	N60 IL22	22	1/2	.07	.10
5.5-6.0	4.5-4	Q60 IR27	Q60 IL27	27	5/8	.08	.12

### PARTIAL PROFILE



Partial profile use for thread turning without topping. Same insert can be used for wide range of pitches.

## PARTIAL PROFILE 55° EXTERNAL

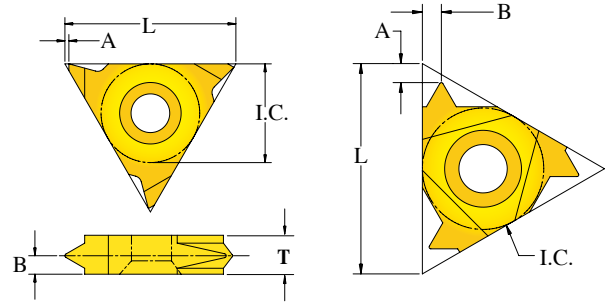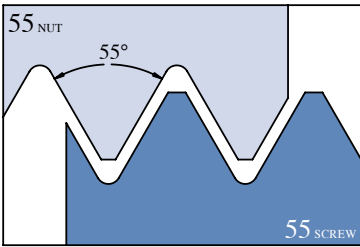



### STANDARD

PITCH RANGE		CATALOG NUMBER		DIMENSIONS			
MM	TPI	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
0.5-1.5	48-16	A55 ER11	A55 EL11	11	1/4	.03	.04
0.5-1.5	48-16	A55 ER16	A55 EL16	16	3/8	.03	.04
1.75-3.0	14-8	G55 ER16	G55 EL16			.05	.07
0.5-3.0	48-8	AG55 ER16	AG55 EL16			.05	.07
3.5-5.0	7-5	N55 ER22	N55 EL22	22	1/2	.07	.10
5.5-6.0	4.5-4	Q55 ER27	Q55 EL27	27	5/8	.08	.12

### VERTICAL INSERTS


PITCH RANGE		CATALOG NUMBER	DIMENSIONS				
MM	TPI	RIGHT HAND	L mm	I.C.	A	B	T
0.5-1.5	48-16	A55 ER16V	16	3/8	.04	.04	.14
1.75-3.0	14-8	G55 ER16V			.04	.07	.14
0.5-3.0	48-8	AG55 ER16V			.04	.07	.14

## PARTIAL PROFILE 55° INTERNAL

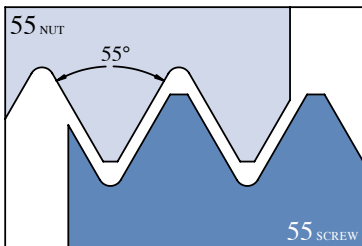

PITCH RANGE		CATALOG NUMBER		DIMENSIONS			
MM	TPI	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
0.5-1.25	48-20	A55 IR06	A55 IL06	06	5/32	.02	.02
0.5-1.5	48-16	A55 IR08	A55 IL08	08	3/16	.02	.03
0.5-1.5	48-16	A55 IR11	A55 IL11	11	1/4	.03	.04
0.5-1.5	48-16	A55 IR16	A55 IL16	16	3/8	.03	.04
1.75-3.0	14-8	G55 IR16	G55 IL16			.05	.07
0.5-3.0	48-8	AG55 IR16	AG55 IL16			.05	.07
3.5-5.0	7-5	N55 IR22	N55 IL22	22	1/2	.07	.10
5.5-6.0	4.5-4	Q55 IR27	Q55 IL27	27	5/8	.08	.12



### FULL PROFILE

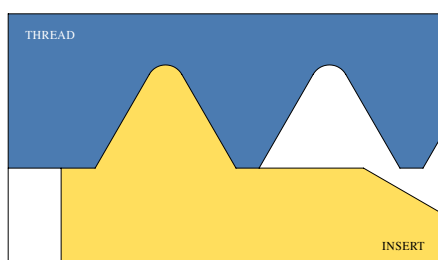

Full profile insert cuts thread profile including all three thread diameters. Separate insert required for every pitch

## ISO METRIC EXTERNAL

ISO 965-1:1999-11  
DIN13 : 2005-08

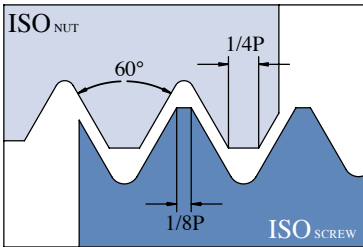

PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
0.35	ISO 0.35 ER11	ISO 0.35 EL11	11	1/4	.03	.02
0.4	ISO 0.4 ER11	ISO 0.4 EL11			.02	.02
0.45	ISO 0.45 ER11	ISO 0.45 EL11			.02	.02
0.5	ISO 0.5 ER11	ISO 0.5 EL11			.02	.02
0.6	ISO 0.6 ER11	ISO 0.6 EL11			.02	.02
0.7	ISO 0.7 ER11	ISO 0.7 EL11			.02	.02
0.75	ISO 0.75 ER11	ISO 0.75 EL11			.02	.02
0.8	ISO 0.8 ER11	ISO 0.8EL11			.02	.02
1.0	ISO 1.0 ER11	ISO 1.0 EL11			.03	.03
1.25	ISO 1.25 ER11	ISO 1.25 EL11			.03	.04
1.5	ISO 1.5 ER11	ISO 1.5 EL11			.03	.04
1.75	ISO 1.75 ER11	ISO 1.75 EL11			.03	.04
2.0	ISO 2.0 ER11	ISO 2.0 EL11			.03	.04
0.35	ISO 0.35 ER16	ISO 0.35 EL16			16	3/8
0.4	ISO 0.4 ER16	ISO 0.4 EL16	.03	.02		
0.45	ISO 0.45 ER16	ISO 0.45 EL16	.03	.02		
0.5	ISO 0.5 ER16	ISO 0.5 EL16	.02	.02		
0.6	ISO 0.6 ER16	ISO 0.6 EL16	.02	.02		
0.7	ISO 0.7 ER16	ISO 0.7 EL16	.02	.02		



continued on next page



## ISO METRIC EXTERNAL

ISO 965-1:1999-11

DIN13 : 2005-08


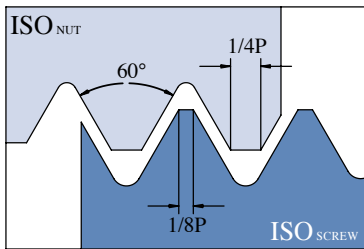


PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
0.75	ISO 0.75 ER16	ISO 0.75 EL16	16	3/8	.02	.02
0.8	ISO 0.8 ER16	ISO 0.8 EL16			.02	.02
1.0	ISO 1.0 ER16	ISO 1.0 EL16			.03	.03
1.25	ISO 1.25 ER16	ISO 1.25 EL16			.03	.04
1.5	ISO 1.5 ER16	ISO 1.5 EL16			.03	.04
1.75	ISO 1.75 ER16	ISO 1.75 EL16			.04	.05
2.0	ISO 2.0 ER16	ISO 2.0 EL16			.04	.05
2.5	ISO 2.5 ER16	ISO 2.5 EL16			.04	.06
3.0	ISO 3.0 ER16	ISO 3.0 EL16			.05	.06
3.5	ISO 3.5 ER22	ISO 3.5 EL22	22	1/2	.06	.09
4.0	ISO 4.0 ER22	ISO 4.0 EL22			.06	.09
4.5	ISO 4.5 ER22	ISO 4.5 EL22			.07	.10
5.0	ISO 5.0 ER22	ISO 5.0 EL22			.07	.10
5.5	ISO 5.5 ER27	ISO 5.5 EL27	27	5/8	.07	.10
6.0	ISO 6.0 ER27	ISO 6.0 EL27			.08	.11

## ISO METRIC EXTERNAL

ISO 965-1:1999-11

DIN13 : 2005-08

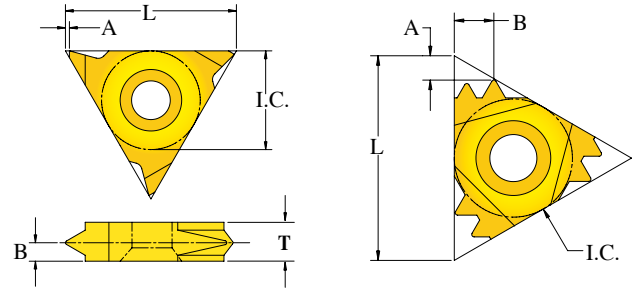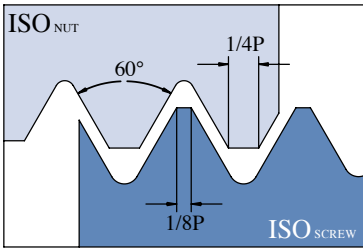

VERTICAL

MULTITOOTH

## MULTITOOTH

PITCH MM	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
1.0	3	ISO1.0 3M ER16	ES16M	16	3/8	.06	.10
1.5	2	ISO1.5 2M ER16				.06	.10
1.5	3	ISO1.5 3M ER22	ES22M	22	1/2	.09	.15
2.0	2	ISO2.0 2M ER22				.08	.12
2.0	3	ISO2.0 3M ER22				.12	.19
2.5	2	ISO2.5 2M ER22	ES27M	27	5/8	.10	.15
3.0	2	ISO3.0 2M ER27				.11	.17



## VERTICAL INSERTS

PITCH MM	CATALOG NUMBER RIGHT HAND	DIMENSIONS				
		L mm	I.C.	A	B	T
1.0	ISO1.0 ER16V	16	3/8	.04	.02	.14
1.25	ISO1.25 ER16V			.04	.04	.14
1.5	ISO1.5 ER16V			.04	.04	.14
2.0	ISO2.0 ER16V			.04	.05	.14

## ISO METRIC INTERNAL

ISO 965-1:1999-11

DIN13 : 2005-08


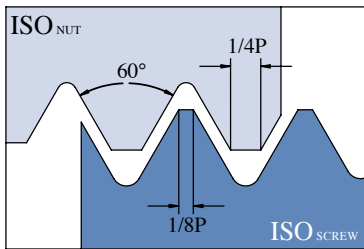


PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
0.5	ISO 0.5 IR06	ISO 0.5 IL06	06	5/32	.03	.02
0.75	ISO 0.75 IR06	ISO 0.75 IL06			.03	.02
1.0	ISO 1.0 IR06	ISO 1.0 IL06			.03	.02
1.25	ISO 1.25 IR06	ISO 1.25 IL06			.03	.02
0.35	ISO 0.35 IR08	ISO 0.35 IL08	08	3/16	.03	.02
0.5	ISO 0.5 IR08	ISO 0.5 IL08			.03	.02
0.75	ISO 0.75 IR08	ISO 0.75 IL08			.03	.02
1.0	ISO 1.0 IR08	ISO 1.0 IL08			.03	.03
1.25	ISO 1.25 IR08	ISO 1.25 IL08			.03	.03
1.5	ISO 1.5 IR08	ISO 1.5 IL08			.03	.03
1.75	ISO 1.75 IR08	ISO 1.75 IL08	11	1/4	.03	.02
0.35	ISO 0.35 IR11	ISO 0.35 IL11			.03	.02
0.4	ISO 0.4 IR11	ISO 0.4 IL11			.03	.02
0.45	ISO 0.45 IR11	ISO 0.45 IL11			.03	.02
0.5	ISO 0.5 IR11	ISO 0.5 IL11			.02	.02
0.6	ISO 0.6 IR11	ISO 0.6 IL11			.02	.02
0.7	ISO 0.7 IR11	ISO 0.7 IL11			.02	.02
0.75	ISO 0.75 IR11	ISO 0.75 IL11			.02	.02
0.8	ISO 0.8 IR11	ISO 0.8 IL11			.02	.02
1.0	ISO 1.0 IR11	ISO 1.0 IL11			.03	.03
1.25	ISO 1.25 IR11	ISO 1.25 IL11			.03	.04
1.5	ISO 1.5 IR11	ISO 1.5 IL11			.03	.04
1.75	ISO 1.75 IR11	ISO 1.75 IL11			.03	.04
2.0	ISO 2.0 IR11	ISO 2.0 IL11			.03	.04

## ISO METRIC INTERNAL

ISO 965-1:1999-11



DIN13 : 2005-08

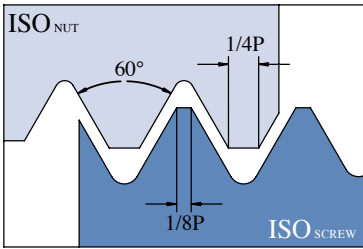

PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
0.35	ISO 0.35 IR16	ISO 0.35 IL16	16	3/8	.03	.02
0.4	ISO 0.4 IR16	ISO 0.4 IL16			.03	.02
0.45	ISO 0.45 IR16	ISO 0.45 IL16			.03	.02
0.5	ISO 0.5 IR16	ISO 0.5 IL16			.02	.02
0.6	ISO 0.6 IR16	ISO 0.6 IL16			.02	.02
0.7	ISO 0.7 IR16	ISO 0.7 IL16			.02	.02
0.75	ISO 0.75 IR16	ISO 0.75 IL16			.02	.02
0.8	ISO 0.8 IR16	ISO 0.8 IL16			.02	.02
1.0	ISO 1.0 IR16	ISO 1.0 IL16			.03	.03
1.25	ISO 1.25 IR16	ISO 1.25 IL16			.03	.04
1.5	ISO 1.5 IR16	ISO 1.5 IL16			.03	.04
1.75	ISO 1.75 IR16	ISO 1.75 IL16			.04	.05
2.0	ISO 2.0 IR16	ISO 2.0 IL16			.04	.05
2.5	ISO 2.5 IR16	ISO 2.5 IL16			.04	.06
3.0	ISO 3.0 IR16	ISO 3.0 IL16			.05	.06

## ISO METRIC INTERNAL

ISO 965-1:1999-11  
DIN13 : 2005-08

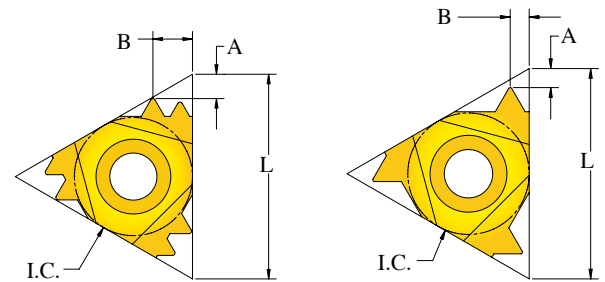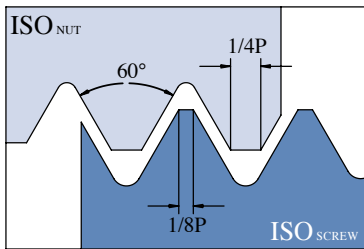

## STANDARD

MULTITOOTH

STANDARD

PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
3.5	ISO 3.5 IR22	ISO 3.5 IL22	22	1/2	.06	.09
4.0	ISO 4.0 IR22	ISO 4.0 IL22			.06	.09
4.5	ISO 4.5 IR22	ISO 4.5 IL22			.07	.09
5.0	ISO 5.0 IR22	ISO 5.0 IL22			.07	.10
5.5	ISO 5.5 IR27	ISO 5.5 IL27	27	5/8	.07	.09
6.0	ISO 6.0 IR27	ISO 6.0 IL27			.08	.10

## MULTITOOTH



PITCH MM	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
1.0	3	ISO1.0 3M IR16	IS16M	16	3/8	.06	.10
1.5	2	ISO1.5 2M IR16				.06	.09
1.5	3	ISO1.5 3M IR22	IS22M	22	1/2	.09	.15
2.0	2	ISO2.0 2M IR22				.08	.11
2.0	3	ISO2.0 3M IR22				.12	.19
3.0	2	ISO3.0 2M IR27	IS27M	27	5/8	.11	.18

## UN

(UNC, UNF, UNEF)

### EXTERNAL

ANSI B1.1-1982

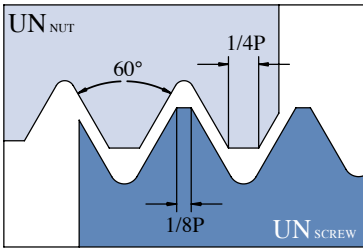

PITCH	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
72	UN 72 ER11	UN 72 EL11	11	1/4	.03	.02
64	UN 64 ER11	UN 64 EL11			.03	.02
56	UN 56 ER11	UN 56 EL11			.03	.02
48	UN 48 ER11	UN 48 EL11			.02	.02
44	UN 44 ER11	UN 44 EL11			.02	.02
40	UN 40 ER11	UN 40 EL11			.02	.02
36	UN 36 ER11	UN 36 EL11			.02	.02
32	UN 32 ER11	UN 32 EL11			.02	.02
28	UN 28 ER11	UN 28 EL11			.02	.03
27	UN 27 ER11	UN 27EL11			.02	.03
24	UN 24 ER11	UN 24 EL11			.03	.03
20	UN 20 ER11	UN 20 EL11			.03	.04
18	UN 18 ER11	UN 18 EL11			.03	.04
16	UN 16 ER11	UN 16 EL11			.04	.04
14	UN 14 ER11	UN 14 EL11			.04	.04
13	UN 13 ER11	UN 13 EL11	.04	.04		
72	UN 72 ER16	UN 72 EL16	16	3/8	.03	.02
64	UN 64 ER16	UN 64 EL16			.03	.02
56	UN 56 ER16	UN 56 EL16			.03	.02
48	UN 48 ER16	UN 48 EL16			.02	.02
44	UN 44 ER16	UN 44 EL16			.02	.02
40	UN 40 ER16	UN 40 EL16			.02	.02

continued on next page



# Threading Inserts

## UN

(UNC, UNF, UNEF)

### EXTERNAL

ANSI B1.1-1982

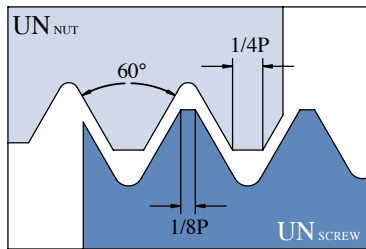



PITCH	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
36	UN 36 ER16	UN 36 EL16	16	3/8	.02	.02
32	UN 32 ER16	UN 32 EL16			.02	.02
28	UN 28 ER16	UN 28 EL16			.02	.03
27	UN 27 ER16	UN 27EL16			.03	.03
24	UN 24 ER16	UN 24 EL16			.03	.03
20	UN 20 ER16	UN 20 EL16			.03	.04
18	UN 18 ER16	UN 18 EL16			.03	.04
16	UN 16 ER16	UN 16 EL16			.04	.04
14	UN 14 ER16	UN 14 EL16			.04	.05
13	UN 13 ER16	UN 13 EL16			.04	.05
12	UN 12 ER16	UN 12 EL16			.04	.06
11	UN 11 ER16	UN 11 EL16			.04	.06
10	UN 10 ER16	UN 10 EL16			.04	.06
9	UN 9 ER16	UN 9 EL16			.05	.07
8	UN 8 ER16	UN 8 EL16	.05	.06		
7	UN 7 ER22	UN 7 EL22	22	1/2	.06	.09
6	UN 6 ER22	UN 6 EL22			.06	.09
5	UN 5 ER22	UN 5 EL22			.07	.10
4.5	UN 4.5 ER27	UN 4.5EL27	27	5/8	.07	.10
4	UN 4 ER27	UN 4 EL27			.08	.11

## UN

(UNC, UNF, UNEF)

### EXTERNAL

ANSI B1.1-1982

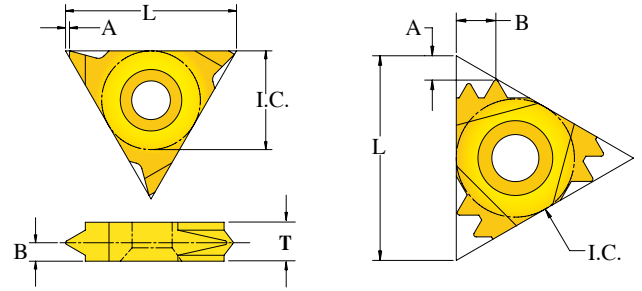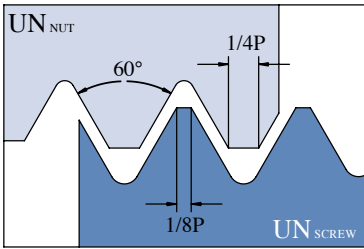

VERTICAL

MULTITOOTH

### MULTITOOTH

PITCH TPI	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
20	2	UN20 2M ER16	ES16M	16	3/8	.06	.08
16	2	UN16 2M ER16				.06	.09
14	2	UN14 2M ER16				.07	.11
16	3	UN16 3M ER22	ES22M	22	1/2	.10	.16
12	2	UN12 2M ER22				.10	.13
12	3	UN12 3M ER22				.13	.20
8	2	UN8 2M ER27	ES27M	27	5/8	.12	.19

### VERTICAL INSERTS

PITCH TPI	CATALOG NUMBER RIGHT HAND	DIMENSIONS				
		L mm	I.C.	A	B	T
20	UN20 ER16V	16	3/8	.04	.03	.14
16	UN16 ER16V			.04	.04	.14
14	UN14 ER16V			.04	.05	.14
12	UN12 ER16V			.04	.05	.14





## UN

(UNC, UNF, UNEF)

### INTERNAL

ANSI B1.1-1982

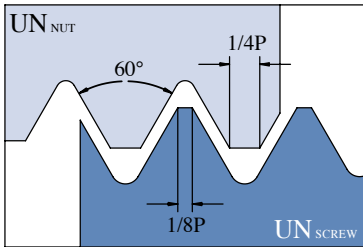



PITCH	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
40	UN 40 IR06	UN 40 IL06	06	5/32	.03	.02
36	UN 36 IR06	UN 36 IL06			.03	.02
32	UN 32 IR06	UN 32 IL06			.03	.02
28	UN 28 IR06	UN 28 IL06			.03	.03
24	UN 24 IR06	UN 24 IL06			.03	.03
20	UN 20 IR06	UN 20 IL06			.03	.03
18	UN 18 IR06	UN 18 IL06			.03	.03
40	UN 40 IR08	UN 40 IL08			08	3/16
36	UN 36 IR08	UN 36 IL08	.03	.02		
32	UN 32 IR08	UN 32 IL08	.03	.02		
28	UN 28 IR08	UN 28 IL08	.03	.03		
24	UN 24 IR08	UN 24 IL08	.03	.03		
20	UN 20 IR08	UN 20 IL08	.03	.03		
18	UN 18 IR08	UN 18 IL08	.03	.03		
16	UN 16 IR08	UN 16 IL08	.03	.03		
14	UN 14 IR08	UN 14 IL08	.03	.03		

## UN

(UNC, UNF, UNEF)

### INTERNAL

ANSI B1.1-1982

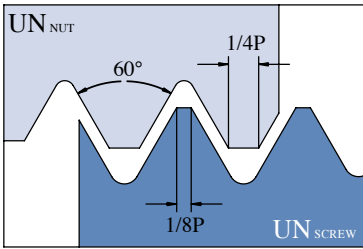

PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
72	UN 72 IR11	UN 72 IL11	11	1/4	.03	.02
64	UN 64 IR11	UN 64 IL11			.03	.02
56	UN 56 IR11	UN 56 IL11			.03	.02
48	UN 48 IR11	UN 48 IL11			.02	.02
44	UN 44 IR11	UN 44 IL11			.02	.02
40	UN 40 IR11	UN 40 IL11			.02	.02
36	UN 36 IR11	UN 36 IL11			.02	.02
32	UN 32 IR11	UN 32 IL11			.02	.02
28	UN 28 IR11	UN 28 IL11			.02	.03
27	UN 27IR11	UN 27IL11			.02	.03
24	UN 24 IR11	UN 24 IL11			.03	.03
20	UN 20 IR11	UN 20 IL11			.03	.04
18	UN 18 IR11	UN 18 IL11			.03	.04
16	UN 16 IR11	UN 16 IL11			.04	.04
14	UN 14 IR11	UN 14 IL11			.04	.04
13	UN 13 IR11	UN 13 IL11			.04	.04
12	UN 12 IR11	UN 12 IL11			.04	.04
11	UN 11 IR11	UN 11 IL11			.04	.04

# Threading Inserts





## UN

(UNC, UNF, UNEF)

### INTERNAL

ANSI B1.1-1982

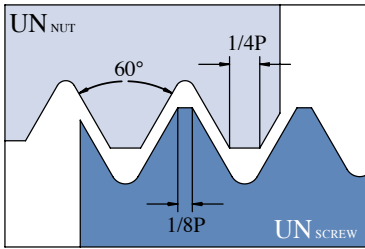



PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
72	UN 72 IR16	UN 72 IL16	16	3/8	.03	.02
64	UN 64 IR16	UN 64 IL16			.03	.02
56	UN 56 IR16	UN 56 IL16			.03	.02
48	UN 48 IR16	UN 48 IL16			.02	.02
44	UN 44 IR16	UN 44 IL16			.02	.02
40	UN 40 IR16	UN 40 IL16			.02	.02
36	UN 36 IR16	UN 36 IL16			.02	.02
32	UN 32 IR16	UN 32 IL16			.02	.02
28	UN 28 IR16	UN 28 IL16			.02	.03
27	UN 27IR16	UN 27IL16			.02	.03
24	UN 24 IR16	UN 24 IL16			.03	.03
20	UN 20 IR16	UN 20 IL16			.03	.04
18	UN 18 IR16	UN 18 IL16			.03	.04
16	UN 16 IR16	UN 16 IL16			.04	.04
14	UN 14 IR16	UN 14 IL16			.04	.05
13	UN 13 IR16	UN 13 IL16			.04	.05
12	UN 12 IR16	UN 12 IL16			.04	.06
11	UN 11 IR16	UN 11 IL16			.04	.06
10	UN 10 IR16	UN 10 IL16			.04	.06
9	UN 9 IR16	UN 9 IL16			.05	.07
8	UN 8 IR16	UN 8 IL16	.05	.06		

## UN

(UNC, UNF, UNEF)

### INTERNAL

ANSI B1.1-1982

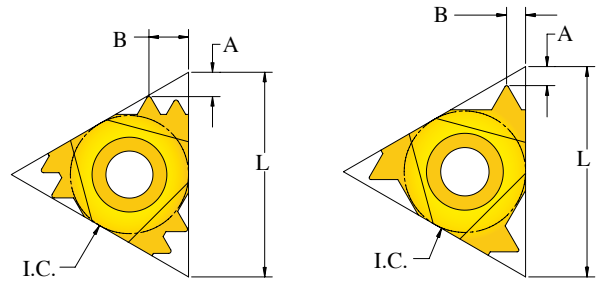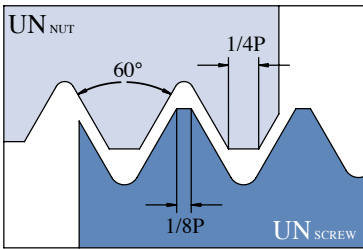

MULTITOOTH

STANDARD

### STANDARD

PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
7	UN 7 IR22	UN 7 IL22	22	1/2	.06	.09
6	UN 6 IR22	UN 6 IL22			.06	.09
5	UN 5 IR22	UN 5 IL22			.07	.09
4.5	UN 4.5 IR27	UN 4.5 IL27	27	5/8	.07	.10
4	UN 4 IR27	UN 4 IL27			.08	.11

### MULTITOOTH

PITCH TPI	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
20	2	UN20 2M IR16	IS16M	16	3/8	.06	.10
16	2	UN16 2M IR16				.06	.09
14	2	UN14 2M IR16				.09	.15
12	2	UN12 2M IR16				.08	.10
16	3	UN16 3M IR22	IS22M	22	1/2	.12	.18
12	2	UN12 2M IR22				.10	.15
12	3	UN12 3M IR22				.13	.21
8	2	UN8 2M IR27	IS27M	27	5/8	.11	.17



## WHITWORTH

BSW, BSF, BSP

**EXTERNAL**

B.S.84: 1956

ISO 228-1: 1994

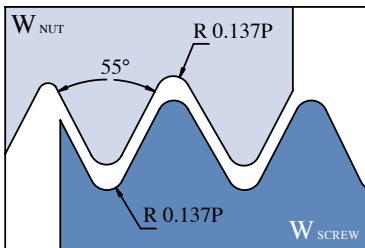

PITCH	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
72	W72 ER11	W72 EL11	11	1/4	.03	.02
60	W60 ER11	W60 EL11			.03	.02
56	W56 ER11	W56 EL11			.03	.02
48	W48 ER11	W48 EL11			.02	.02
40	W 40 ER11	W 40 EL11			.02	.02
36	W36 ER11	W36 EL11			.02	.02
32	W 32 ER11	W 32 EL11			.02	.02
28	W 28 ER11	W 28 EL11			.02	.03
26	W 26 ER11	W 26 EL11			.03	.03
24	W 24 ER11	W 24 EL11			.03	.03
22	W 22 ER11	W 22 EL11			.03	.04
20	W 20 ER11	W 20 EL11			.03	.04
19	W 19 ER11	W 19 EL11			.03	.04
18	W 18 ER11	W 18 EL11			.03	.04
16	W 16 ER11	W 16 EL11	.04	.04		
14	W 14 ER11	W 14 EL11	.04	.04		
72	W72 ER16	W72 EL16	16	3/8	.03	.02
60	W60 ER16	W60 EL16			.03	.02
56	W56 ER16	W56 EL16			.03	.02
48	W48 ER16	W48 EL16			.02	.02
40	W 40 ER16	W 40 EL16			.02	.02
36	W 36 ER16	W 36 EL16			0.2	0.2

continued on next page



## WHITWORTH

BSW, BSF, BSP

**EXTERNAL**

B.S.84: 1956

ISO 228-1: 1994

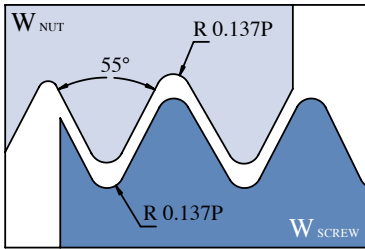

PITCH	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
32	W 32 ER16	W 32 EL16	16	3/8	.02	.02
28	W 28 ER16	W 28 EL16			.02	.03
26	W 26 ER16	W 26 EL16			.02	.03
24	W 24 ER16	W 24 EL16			.03	.03
22	W 22 ER16	W 22 EL16			.03	.04
20	W 20 ER16	W 20 EL16			.03	.04
19	W 19 ER16	W 19 EL16			.03	.04
18	W 18 ER16	W 18 EL16			.03	.04
16	W 16 ER16	W 16 EL16			.04	.04
14	W 14 ER16	W 14 EL16			.04	.05
12	W 12 ER16	W 12 EL16			.04	.05
11	W 11 ER16	W 11 EL16			.04	.06
10	W 10 ER16	W 10 EL16			.04	.06
9	W 9 ER16	W 9 EL16			.05	.07
8	W 8 ER16	W 8 EL16	.05	.06		
7	W 7 ER22	W 7 EL22	22	1/2	.06	.09
6	W 6 ER22	W 6 EL22			.06	.09
5	W 5 ER22	W 5 EL22			.07	.09
4.5	W 4.5 ER27	W 4.5 EL27	27	5/8	.07	.10
4	W 4 ER27	W 4 EL27			.07	.11



## WHITWORTH

BSW, BSF, BSP

**EXTERNAL**

B.S.84: 1956

ISO 228-1: 1994

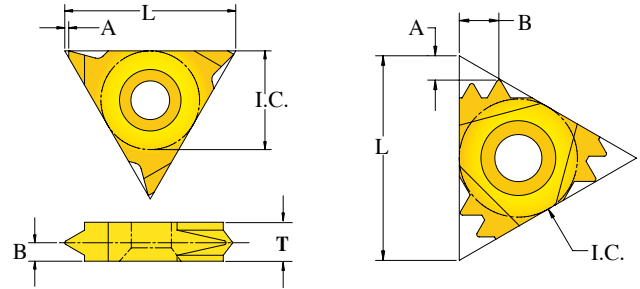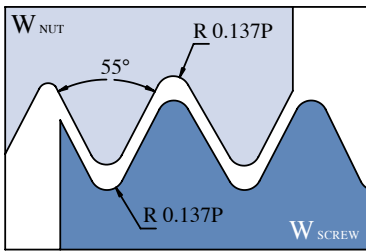

VERTICAL

MULTITOOTH

## MULTITOOTH

PITCH TPI	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
14	2	W14 2M ER16	ES16M	16	3/8	.07	.11
14	3	W14 3M ER22	ES22M	22	1/2	.11	.18
11	2	W11 2M ER22				.09	.14

## VERTICAL INSERTS

PITCH TPI	CATALOG NUMBER RIGHT HAND	DIMENSIONS				
		L mm	I.C.	A	B	T
19	W19 ER16V	16	3/8	.04	.03	.14
14	W14 ER16V			.04	.04	.14
11	W11 ER16V			.04	.05	.14



## WHITWORTH

BSW, BSF, BSP

**INTERNAL**

B.S.84: 1956

ISO 228-1: 1994

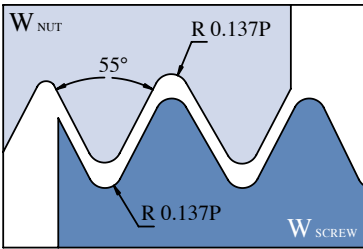

PITCH  TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
28	W28 IR06	W28 IL06	06	5/32	.03	.02
26	W26 IR06	W26 IL06			.03	.02
24	W24 IR06	W24 IL06			.03	.02
22	W22 IR06	W22 IL06			.03	.02
19	W19 IR06	W19 IL06			.03	.03
18	W18 IR06	W18 IL06			.03	.03
28	W 28 IR08	W 28 IL08	08	3/16	.03	.03
26	W 26 IR08	W 26 IL08			.03	.03
24	W 24 IR08	W 24 IL08			.03	.03
20	W 20 IR08	W 20 IL08			.03	.03
19	W 19 IR08	W 19 IL08			.03	.03
18	W 18 IR08	W 18 IL08			.03	.03
16	W 16 IR08	W 16 IL08	11	1/4	.03	.03
72	W72 IR11	W72 IL11			.03	.02
60	W60 IR11	W60 IL11			.03	.02
56	W56 IR11	W56 IL11			.03	.02
48	W48 IR11	W48 IL11			.02	.02
40	W 40 IR11	W 40 IL11			.02	.02
32	W 32 IR11	W 32 IL11			.02	.02
28	W 28 IR11	W 28 IL11			.02	.03
26	W 26 IR11	W 26 IL11			.03	.03
24	W 24 IR11	W 24 IL11			.03	.03
20	W 20 IR11	W 20 IL11			.03	.04
19	W 19 IR11	W 19 IL11			.03	.04
18	W 18 IR11	W 18 IL11			.03	.04
16	W 16 IR11	W 16 IL11			.04	.04
14	W 14 IR11	W 14 IL11	.04	.04		





## WHITWORTH

BSW, BSF, BSP

INTERNAL

B.S.84: 1956

ISO 228-1: 1994

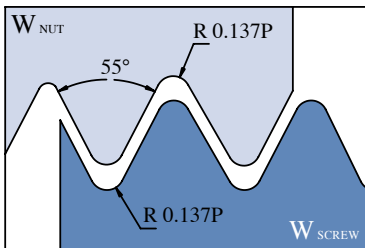

PITCH	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
72	W72 IR16	W72 IL16	16	3/8	.03	.02
60	W60 IR16	W60 IL16			.03	.02
56	W56 IR16	W56 IL16			.03	.02
48	W48 IR16	W48 IL16			.02	.02
40	W 40 IR16	W 40 IL16			.02	.02
36	W36 IR16	W36 IL16			.02	.02
32	W 32 IR16	W 32 IL16			.02	.02
28	W 28 IR16	W 28 IL16			.02	.03
26	W 26 IR16	W 26 IL16			.03	.03
24	W 24 IR16	W 24 IL16			.03	.03
22	W 22 IR16	W 22 IL16			.03	.04
20	W 20 IR16	W 20 IL16			.03	.04
19	W 19 IR16	W 19 IL16			.03	.04
18	W 18 IR16	W 18 IL16			.03	.04
16	W 16 IR16	W 16 IL16			.04	.04
14	W 14 IR16	W 14 IL16			.04	.05
12	W 12 IR16	W 12 IL16			.04	.06
11	W 11 IR16	W 11 IL16			.04	.06
10	W 10 IR16	W 10 IL16			.04	.06
9	W 9 IR16	W 9 IL16			.05	.07
8	W 8 IR16	W 8 IL16	.05	.06		



## WHITWORTH

BSW, BSF, BSP

INTERNAL

B.S.84: 1956

ISO 228-1: 1994

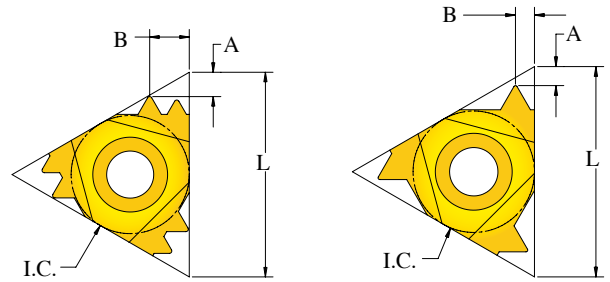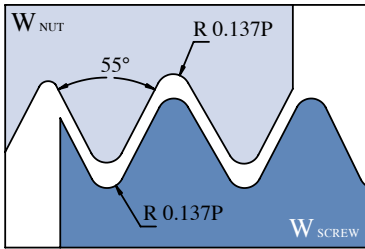

MULTITOOTH

STANDARD

## STANDARD



PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
7	W 7 IR22	W 7 IL22	22	1/2	.06	.09
6	W 6 IR22	W 6 IL22			.06	.09
5	W 5 IR22	W 5 IL22			.07	.09
4.5	W 4.5 IR27	W 4.5 IL27	27	5/8	.07	.10
4	W 4 IR27	W 4 IL 27			.08	.11

## MULTITOOTH

PITCH TPI	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
14	2	W14 2M IR16	IS16M	16	3/8	.07	.11
14	3	W14 3M IR22	IS22M	22	1/2	.11	.18
11	2	W11 2M IR22				.09	.14

## PG

DIN 40430 ; 1971

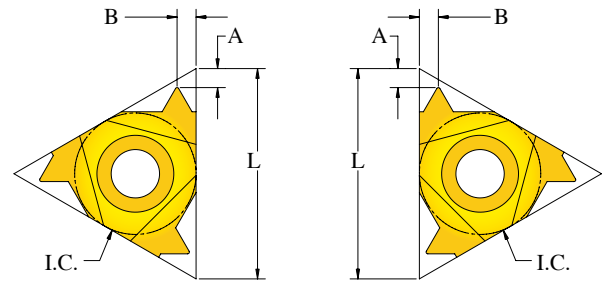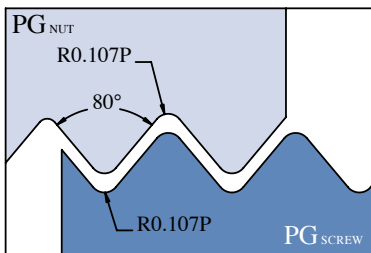

### EXTERNAL

INTERNAL

EXTERNAL



PITCH TPI	SIZE	CATALOG NUMBER RIGHT HAND	DIMENSIONS			
			L mm	I.C.	A	B
20	PG7	PG20 ER11	11	1/4	.05	.03
18	PG 9, PG 11, PG 13.5, PG16	PG18 ER11			.03	.04
16	PG21, PG29, PG36, PG42, PG48	PG16 ER11			.04	.04
20	PG7	PG20 ER16	16	3/8	.03	.03
18	PG 9, PG 11, PG 13.5, PG16	PG18 ER16			.04	.04
16	PG21, PG29, PG36, PG42, PG48	PG16 ER16			.04	.04

### INTERNAL

PITCH TPI	SIZE	CATALOG NUMBER RIGHT HAND	DIMENSIONS			
			L mm	I.C.	A	B
20	PG7	PG20 IR11	11	1/4	.05	.03
18	PG 9, PG 11, PG 13.5, PG16	PG18 IR11			.03	.04
20	PG7	PG20 IR16			.03	.03
18	PG 9, PG 11, PG 13.5, PG16	PG18 IR16	16	3/8	.03	.04
16	PG21, PG29, PG36, PG42, PG48	PG16 IR16			.04	.04

## BSPT EXTERNAL

B.S. 21: 1985

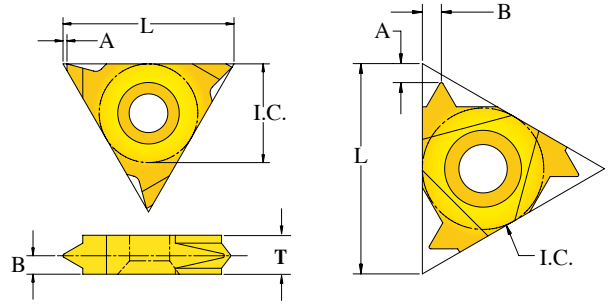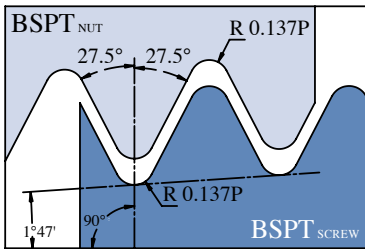

VERTICAL

STANDARD

## STANDARD



PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
28	BSPT 28 ER11	BSPT 28 EL11	11	1/4	.03	.03
19	BSPT 19 ER11	BSPT 19 EL11			.03	.04
14	BSPT 14 ER11	BSPT 14 EL11			.04	.04
28	BSPT 28 ER16	BSPT 28 EL16	16	3/8	.03	.03
19	BSPT 19 ER16	BSPT 19 EL16			.03	.04
14	BSPT 14 ER16	BSPT 14 EL16			.04	.05
11	BSPT 11 ER16	BSPT 11 EL16			.04	.06

## VERTICAL INSERTS

PITCH TPI	CATALOG NUMBER	DIMENSIONS				
	RIGHT HAND	L mm	I.C.	A	B	T
28	BSPT28 ER16V	16	3/8	.04	.03	.14
19	BSPT19 ER16V			.04	.04	.14
14	BSPT14 ER16V			.04	.05	.14
11	BSPT11 ER16V			.04	.06	.14

## BSPT INTERNAL



B.S. 21: 1985

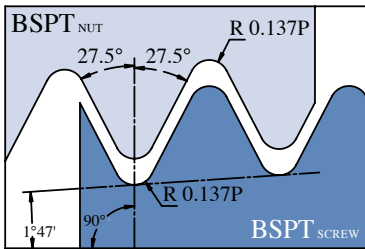

PITCH  TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
28	BSPT 28 IR06	BSPT 28 IL06	06	5/32	.03	.02
28	BSPT 28 IR08	BSPT 28 IL08	08	3/16	.03	.02
19	BSPT 19 IR08	BSPT 19 IL08			.03	.03
28	BSPT 28 IR11	BSPT 28 IL11	11	1/4	.03	.03
19	BSPT 19 IR11	BSPT 19 IL11			.03	.04
14	BSPT 14 IR11	BSPT 14 IL11			.04	.04
28	BSPT 28 IR16	BSPT 28 IL16	16	3/8	.03	.03
19	BSPT 19 IR16	BSPT 19 IL16			.03	.04
14	BSPT 14 IR16	BSPT 14 IL16			.04	.05
11	BSPT 11 IR16	BSPT 11 IL16			.04	.06

## NPT EXTERNAL

ANSI/ASME B 1.20.1-1983

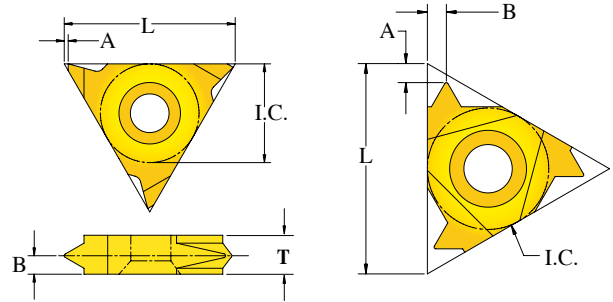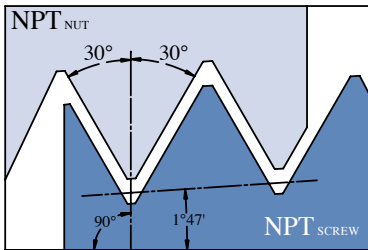

VERTICAL

STANDARD

## STANDARD

PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
27	NPT 27 ER11	NPT 27 EL11	11	1/4	.03	.03
18	NPT 18 ER11	NPT 18 EL11			.03	.04
14	NPT 14 ER11	NPT 14 EL11			.03	.04
27	NPT 27 ER16	NPT 27 EL16	16	3/8	.03	.04
18	NPT 18 ER16	NPT 18 EL16			.03	.04
14	NPT 14 ER16	NPT 14 EL16			.04	.05
11.5	NPT 11.5 ER16	NPT 11.5 EL16			.04	.06
8	NPT 8 ER16	NPT 8 EL16			.05	.07

## MULTITOOTH



PITCH TPI	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
11.5	2	NPT11.5 2M ER22	ES22M	22	1/2	.09	.13
11.5	3	NPT11.5 3M ER27	ES27M	27	5/8	.14	.22
8	2	NPT8 2M ER27				.12	.19

## VERTICAL INSERTS

PITCH TPI	CATALOG NUMBER		DIMENSIONS				
	RIGHT HAND		L mm	I.C.	A	B	T
27	NPT27 ER16V		16	3/8	.04	.03	.14
18	NPT18 ER16V				.04	.04	.14
14	NPT14 ER16V				.04	.05	.14
11.5	NPT11.5 ER16V				.04	.06	.14

## NPT INTERNAL

ANSI/ASME B 1.20.1-1983

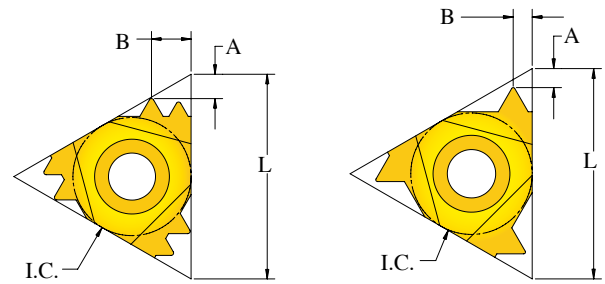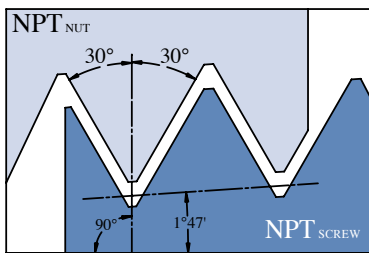

MULTITOOTH

STANDARD

## STANDARD



PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
27	NPT27 IR06	NPT27 IL06	06	5/32	.03	.02
27	NPT 27 IR08	NPT 27 IL08	08	3/16	.03	.02
18	NPT 18 IR08	NPT 18 IL08			.03	.03
27	NPT 27 IR11	NPT 27 IL11	11	1/4	.03	.03
18	NPT 18 IR11	NPT 18 IL11			.03	.04
14	NPT 14 IR11	NPT 14 IL11			.03	.04
27	NPT 27 IR16	NPT 27 IL16	16	3/8	.03	.03
18	NPT 18 IR16	NPT 18 IL16			.03	.04
14	NPT 14 IR16	NPT 14 IL16			.04	.05
11.5	NPT 11.5 IR16	NPT 11.5 IL16			.04	.06
8	NPT 8 IR16	NPT 8 IL16			.05	.07

## MULTITOOTH

PITCH TPI	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
11.5	2	NPT11.5 2M IR22	IS22M	22	1/2	.09	.13
11.5	3	NPT11.5 3M IR27	IS27M	27	5/8	.14	.22
8	2	NPT8 2M IR27				.12	.19

## NPTF EXTERNAL

ANSI B 1.20.3-1976

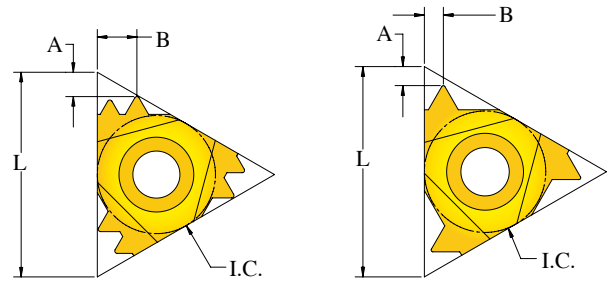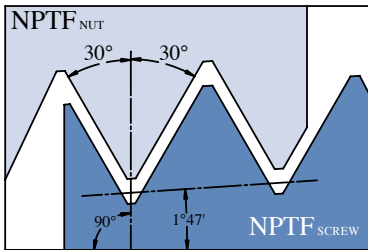

MULTITOOTH

STANDARD

## STANDARD

PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
27	NPTF 27 ER11	NPTF 27 EL11	11	1/4	.03	.03
18	NPTF 18 ER11	NPTF 18 EL11			.03	.04
14	NPTF 14 ER11	NPTF 14 EL11			.03	.04
27	NPTF 27 ER16	NPTF 27 EL16	16	3/8	.03	.03
18	NPTF 18 ER16	NPTF 18 EL16			.03	.04
14	NPTF 14 ER16	NPTF 14 EL16			.04	.05
11.5	NPTF 11.5 ER16	NPTF 11.5 EL16			.04	.06
8	NPTF 8 ER16	NPTF 8 EL16			.05	.07



## MULTITOOTH

PITCH TPI	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
11.5	2	NPTF11.5 2M ER22	ES22M	22	1/2	.09	.15



## NPTF INTERNAL

ANSI B 1.20.3-1976

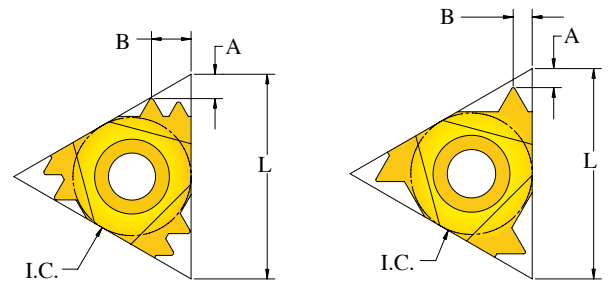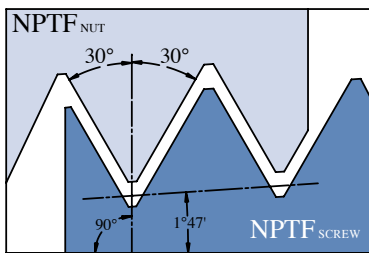

MULTITOOTH

STANDARD

## STANDARD

PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
27	NPTF 27 IR06	NPTF 27 IL06	06	5/32	.03	.02
27	NPTF 27 IR08	NPTF 27 IL08	08	3/16	.03	.02
18	NPTF 18 IR08	NPTF 18 IL08			.03	.03
27	NPTF 27 IR11	NPTF 27 IL11	11	1/4	.03	.03
18	NPTF 18 IR11	NPTF 18 IL11			.03	.04
14	NPTF 14 IR11	NPTF 14 IL11			.03	.04
27	NPTF 27 IR16	NPTF 27 IL16	16	3/8	.03	.03
18	NPTF 18 IR16	NPTF 18 IL16			.03	.04
14	NPTF 14 IR16	NPTF 14 IL16			.04	.05
11.5	NPTF 11.5 IR16	NPTF 11.5 IL16			.04	.06
8	NPTF 8 IR16	NPTF 8 IL16			.05	.07



## MULTITOOTH

PITCH TPI	TEETH	CATALOG NUMBER RIGHT HAND	ANVIL	DIMENSIONS			
				L mm	I.C.	A	B
11.5	2	NPTF11.5 2M IR22	IS22M	22	1/2	.09	.13

## TRAPEZ EXTERNAL


DIN 103:1977

ISO 2901:1993

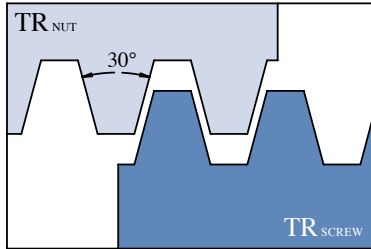

PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
1.5	TR 1.5 ER11	TR 1.5 EL11	11	1/4	.03	.03
1.5	TR 1.5 ER16	TR 1.5 EL16	16	3/8	.04	.04
2.0	TR 2.0 ER16	TR 2.0 EL16			.04	.05
3.0	TR 3.0 ER16	TR 3.0 EL16			.05	.06
4.0	TR 4.0 ER22	TR 4.0 EL22	22	1/2	.07	.08
5.0	TR 5.0 ER22	TR 5.0 EL22			.08	.09
6.0	TR 6.0 ER27	TR 6.0 EL27	27	5/8	.09	.10
7.0	TR 7.0 ER27	TR 7.0 EL27			.08	.10

### SEMI FULL PROFILE


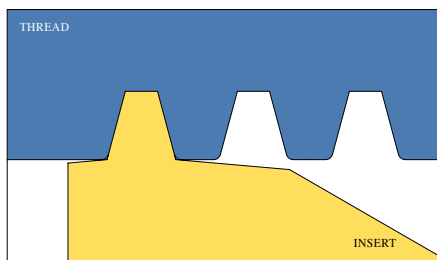


Semi full profile inserts style completes the thread form and breaks the corners of outside thread diameter, used for Trapezoidal threading inserts.

## TRAPEZ INTERNAL

DIN 103:1977



ISO 2901:1993

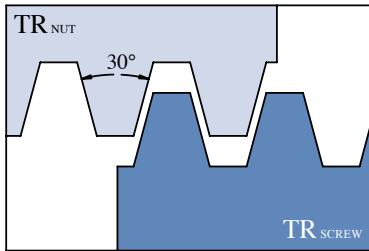

PITCH  MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
1.5	TR 1.5 IR11	TR 1.5 IL11	11	1/4	.03	.03
1.5	TR 1.5 IR16	TR 1.5 IL16	16	3/8	.04	.04
2.0	TR 2.0 IR16	TR 2.0 IL16			.04	.05
3.0	TR 3.0 IR16	TR 3.0 IL16			.05	.06
4.0	TR4.0 IR16	TR4.0 IL16			.05	.06
4.0	TR 4.0 IR22	TR 4.0 IL22	22	1/2	.07	.07
5.0	TR 5.0 IR22	TR 5.0 IL22			.10	.09
6.0	TR 6.0 IR22	TR 6.0 IL22	27	5/8	.08	.10
6.0	TR 6.0 IR27	TR 6.0 IL27			.09	.10
7.0	TR 7.0 IR27	TR 7.0 IL27			.09	.10

## ACME EXTERNAL



ANSI/ASME 1.5-1988

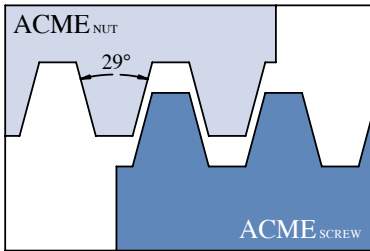

PITCH  TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
16	ACME 16 ER11	ACME 16 EL11	11	1/4	.04	.04
16	ACME 16 ER16	ACME 16 EL16	16	3/8	.04	.04
14	ACME 14 ER16	ACME 14 EL16			.04	.05
12	ACME 12 ER16	ACME 12 EL16			.04	.05
10	ACME 10 ER16	ACME 10 EL16			.05	.06
8	ACME 8 ER16	ACME 8 EL16			.06	.06
6	ACME 6 ER22	ACME 6 EL22	22	1/2	.07	.08
5	ACME 5 ER22	ACME 5 EL22			.08	.09
4	ACME 4 ER27	ACME 4 EL27	27	5/8	.09	.10

## ACME INTERNAL



ANSI/ASME 1.5-1988

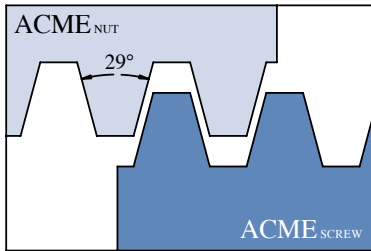

PITCH  TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
16	ACME 16 IR11	ACME 16 IL11	11	1/4	.04	.04
16	ACME 16 IR16	ACME 16 IL16	16	3/8	.04	.04
14	ACME 14 IR16	ACME 14 IL16			.04	.05
12	ACME 12 IR16	ACME 12 IL16			.04	.05
10	ACME 10 IR16	ACME 10 IL16			.05	.06
8	ACME 8 IR16	ACME 8 IL16			.06	.06
6	ACME 6 IR16	ACME 6 IL16			.06	.06
6	ACME 6 IR22	ACME 6 IL22	22	1/2	.07	.08
5	ACME 5 IR22	ACME 5 IL22			.08	.09
4	ACME 4 IR22	ACME 4 IL22			.08	.09
4	ACME 4 IR27	ACME 4 IL27	27	5/8	.09	.10

## STUB ACME EXTERNAL



ASME/ANSI B 1.8-1988

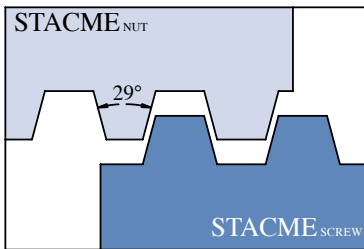

PITCH  TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
16	STACME 16 ER11	STACME 16 EL11	11	1/4	.04	.04
16	STACME 16 ER16	STACME 16 EL16	16	3/8	.04	.04
14	STACME 14 ER16	STACME 14 EL16			.04	.05
12	STACME 12 ER16	STACME 12 EL16			.04	.05
10	STACME 10 ER16	STACME 10 EL16			.05	.06
8	STACME 8 ER16	STACME 8 EL16			.06	.06
6	STACME 6 ER16	STACME 6 EL16			.07	.07
6	STACME 6 ER22	STACME 6 EL22	22	1/2	.07	.08
5	STACME 5 ER22	STACME 5 EL22			.08	.09
4	STACME 4 ER22	STACME 4 EL22			.09	.09
4	STACME 4ER27	STACME 4 EL27	27	5/8	.09	.10
3	STACME 3 ER27	STACME 3 EL27			.11	.11

## STUB ACME INTERNAL



ASME/ANSI B 1.8-1988

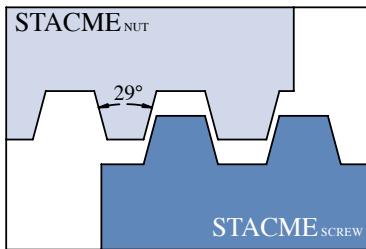


PITCH  TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
16	STACME 16 IR11	STACME 16 IL11	11	1/4	.04	.04
16	STACME 16 IR16	STACME 16 IL16	16	3/8	.04	.04
14	STACME 14 IR16	STACME 14 IL16			.04	.05
12	STACME 12 IR16	STACME 12 IL16			.04	.05
10	STACME 10 IR16	STACME 10 IL16			.05	.06
8	STACME 8 IR16	STACME 8 IL16			.06	.06
6	STACME 6 IR16	STACME 6 IL16			.07	.07
6	STACME 6 IR22	STACME 6 IL22	22	1/2	.07	.08
5	STACME 5 IR22	STACME 5 IL22			.08	.09
4	STACME 4 IR22	STACME 4 IL22			.09	.09
4	STACME 4 IR27	STACME 4 IL27	27	5/8	.09	.10
3	STACME 3 IR27	STACME 3 IL27			.11	.11

## AMERICAN BUTTRESS EXTERNAL

ANSI B 1.9-1973

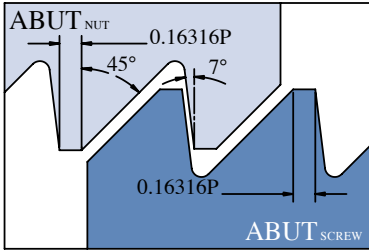

PITCH  TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
20	ABUT 20 ER11	ABUT 20 EL11	11	1/4	.04	.06
16	ABUT 16 ER11	ABUT 16 EL11			.04	.06
20	ABUT 20 ER16	ABUT 20 EL16	16	3/8	.04	.06
16	ABUT 16 ER16	ABUT 16 EL16			.04	.06
12	ABUT 12 ER16	ABUT 12 EL16			.06	.08
10	ABUT 10 ER16	ABUT 10 EL16			.06	.09
8	ABUT 8 ER22	ABUT 8 EL22	22	1/2	.08	.13
6	ABUT 6 ER22	ABUT 6 EL22			.08	.13


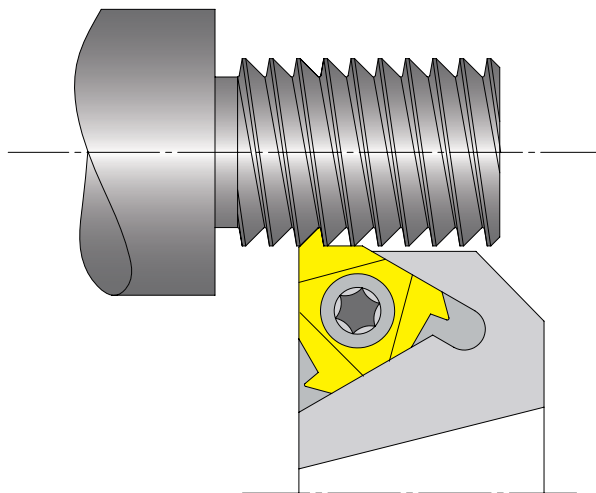


**STANDARD LEADING ANGLE: 45°**




## AMERICAN BUTTRESS INTERNAL

ANSI B 1.9-1973

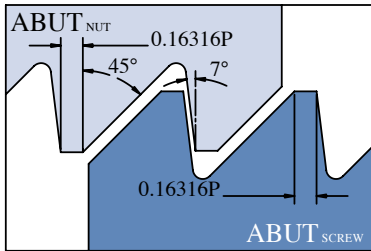



PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
20	ABUT 20 IR11	ABUT 20 IL11	11	1/4	.04	.06
16	ABUT 16 IR11	ABUT 16 IL11			.04	.06
20	ABUT 20 IR16	ABUT 20 IL16	16	3/8	.04	.06
16	ABUT 16 IR16	ABUT 16 IL16			.04	.06
12	ABUT 12 IR16	ABUT 12 IL16			.06	.08
10	ABUT 10 IR16	ABUT 10 IL16			.06	.09
8	ABUT 8 IR22	ABUT 8 IL22	22	1/2	.08	.13
6	ABUT 6 IR22	ABUT 6 IL22			.08	.13

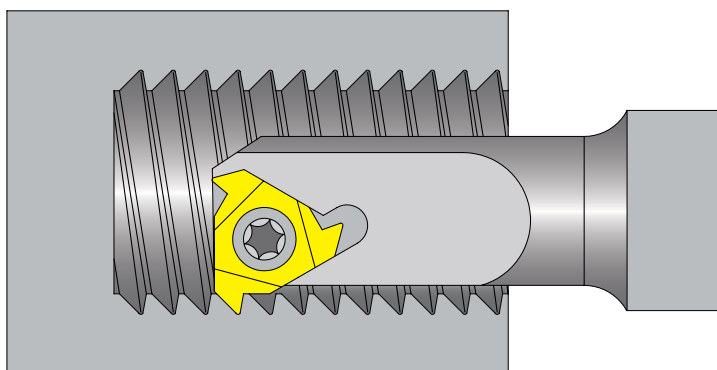

STANDARD LEADING ANGLE: 45°

## UNJ EXTERNAL

MIL-S-8879A

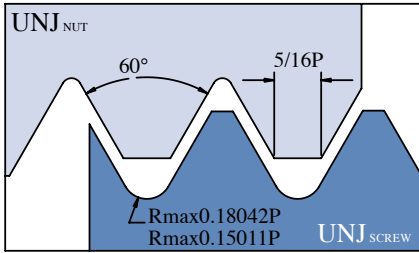



PITCH  TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
32	UNJ 32 ER11	UNJ 32 EL11	11	1/4	.02	.02
28	UNJ 28 ER11	UNJ 28 EL11			.02	.02
24	UNJ 24 ER11	UNJ 24 EL11			.03	.03
20	UNJ 20 ER11	UNJ 20 EL11			.03	.04
18	UNJ 18 ER11	UNJ 18 EL11			.03	.04
16	UNJ 16 ER11	UNJ 16 EL11			.03	.04
14	UNJ 14 ER11	UNJ 14 EL11			.04	.04
32	UNJ 32 ER16	UNJ 32 EL16	16	3/8	.02	.02
28	UNJ 28 ER16	UNJ 28 EL16			.02	.02
24	UNJ 24 ER16	UNJ 24 EL16			.03	.03
20	UNJ 20 ER16	UNJ 20 EL16			.03	.04
18	UNJ 18 ER16	UNJ 18 EL16			.03	.04
16	UNJ 16 ER16	UNJ 16 EL16			.03	.04
14	UNJ 14 ER16	UNJ 14 EL16			.04	.05
13	UNJ 13 ER16	UNJ 13 EL16			.04	.05
12	UNJ 12 ER16	UNJ 12 EL16			.04	.06
11	UNJ 11 ER16	UNJ 11 EL16			.04	.06
10	UNJ 10 ER16	UNJ 10 EL16			.04	.06
9	UNJ 9 ER16	UNJ 9 EL16	.05	.06		
8	UNJ 8 ER16	UNJ 8 EL16	.05	.06		

# Threading Inserts



## UNJ INTERNAL



MIL-S-8879A

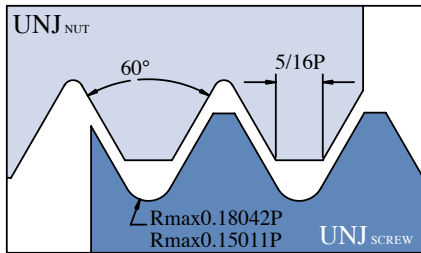

PITCH  TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
32	UNJ 32 IR11	UNJ 32 IL11	11	1/4	.02	.02
28	UNJ 28 IR11	UNJ 28 IL11			.02	.02
24	UNJ 24 IR11	UNJ 24 IL11			.03	.03
20	UNJ 20 IR11	UNJ 20 IL11			.03	.04
18	UNJ 18 IR11	UNJ 18 IL11			.03	.04
16	UNJ 16 IR11	UNJ 16 IL11			.03	.04
14	UNJ 14 IR11	UNJ 14 IL11			.04	.04
32	UNJ 32 IR16	UNJ 32 IL16			16	3/8
28	UNJ 28 IR16	UNJ 28 IL16	.02	.02		
24	UNJ 24 IR16	UNJ 24 IL16	.03	.03		
20	UNJ 20 IR16	UNJ 20 IL16	.03	.04		
18	UNJ 18 IR16	UNJ 18 IL16	.03	.04		
16	UNJ 16 IR16	UNJ 16 IL16	.03	.04		
14	UNJ 14 IR16	UNJ 14 IL16	.04	.05		
12	UNJ 12 IR16	UNJ 12 IL16	.04	.06		
11	UNJ 11 IR16	UNJ 11 IL16	.04	.06		
10	UNJ 10 IR16	UNJ 10 IL16	.04	.06		
9	UNJ 9 IR16	UNJ 9 IL16	.05	.06		
8	UNJ 8 IR16	UNJ 8 IL16	.05	.06		

## ROUND (DIN 405)

DIN 405 : 1997

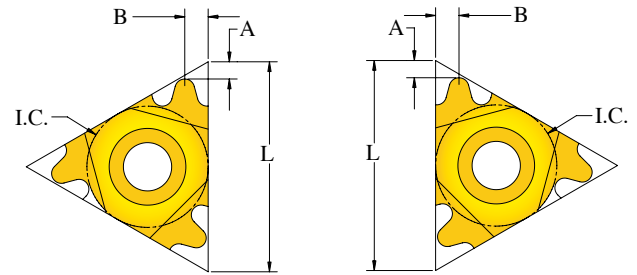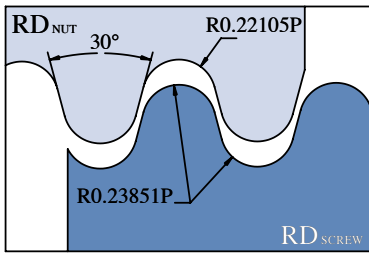

INTERNAL

EXTERNAL

### EXTERNAL



PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
10	RD 10 ER16	RD 10 EL16	16	3/8	.04	.05
8	RD 8 ER16	RD 8 EL16			.06	.06
6	RD 6 ER16	RD 6 EL16			.06	.06
6	RD 6 ER22	RD 6 EL22	22	1/2	.06	.07
4	RD 4 ER22	RD 4 EL22			.09	.09
4	RD 4 ER27	RD 4 EL27			27	5/8

### INTERNAL

PITCH TPI	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
10	RD 10 IR16	RD 10 IL16	16	3/8	.04	.05
8	RD 8 IR16	RD 8 IL16			.06	.06
6	RD 6 IR16	RD 6 IL16			.06	.06
6	RD 6 IR22	RD 6 IL22	22	1/2	.06	.07
4	RD 4 IR22	RD 4 IL22			.09	.09
4	RD 4 IR27	RD 4 IL27			27	5/8

## ROUND (DIN 20400)

DIN 20400 : 1990

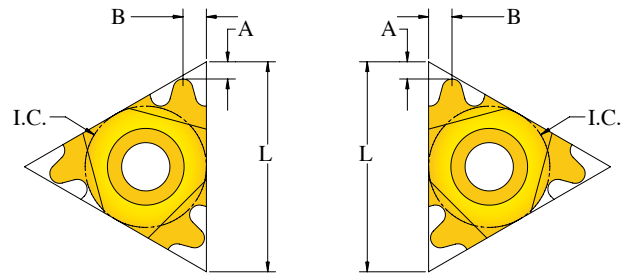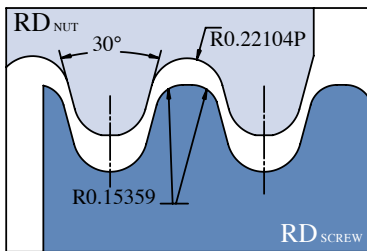

### EXTERNAL



PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
3.0	DIN20400 3.0 ER16	DIN20400 3.0 EL16	16	3/8	.05	.06
4.0	DIN20400 4.0 ER22	DIN20400 4.0 EL22	22	1/2	.06	.06
5.0	DIN20400 5.0 ER22	DIN20400 5.0 EL22			.06	.07
6.0	DIN20400 6.0 ER22	DIN20400 6.0 EL22			.07	.08

### INTERNAL

PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
3.0	DIN20400 3.0 IR16	DIN20400 3.0 IL16	16	3/8	.05	.06
4.0	DIN20400 4.0 IR22	DIN20400 4.0 IL22	22	1/2	.06	.06
5.0	DIN20400 5.0 IR22	DIN20400 5.0 IL22			.06	.07
6.0	DIN20400 6.0 IR22	DIN20400 6.0 IL22			.07	.08

## MJ

ISO 5855-1:1989

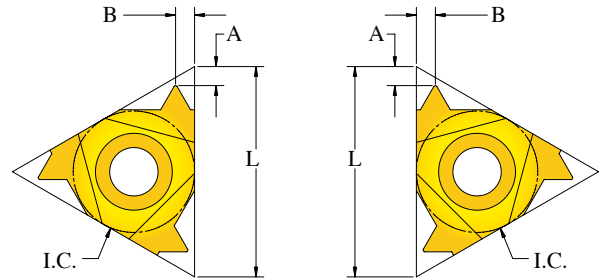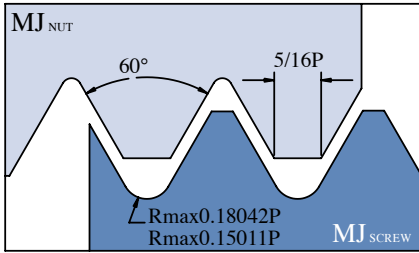

INTERNAL

EXTERNAL

### EXTERNAL



PITCH MM	CATALOG NUMBER RIGHT HAND	DIMENSIONS			
		L mm	I.C.	A	B
1.0	MJ1.0 ER16	16	3/8	.03	.03
1.25	MJ1.25 ER16			.03	.04
1.5	MJ1.5 ER16			.03	.04
2.0	MJ2.0 ER16			.04	.05
2.5	MJ2.5 ER16			.04	.06
3.0	MJ3.0 ER16			.04	.06

### INTERNAL

PITCH MM	CATALOG NUMBER RIGHT HAND	DIMENSIONS			
		L mm	I.C.	A	B
1.0	MJ1.0 IR11	11	1/4	.03	.03
1.25	MJ1.25 IR11			.03	.04
1.5	MJ1.5 IR11			.03	.04
1.0	MJ1.0 IR16	16	3/8	.03	.03
1.25	MJ1.25 IR16			.03	.03
1.5	MJ1.5 IR16			.03	.04
2.0	MJ2.0 IR16			.04	.05
2.5	MJ2.5 IR16			.03	.06
3.0	MJ3.0 IR16			.04	.06

## SAGENGEWINDE

DIN 513 : 1985

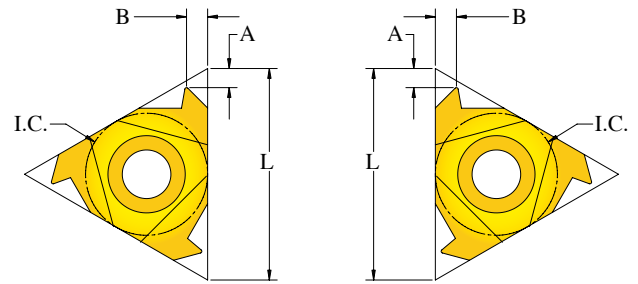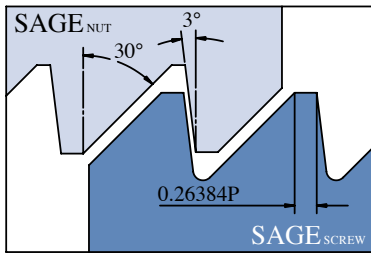

### EXTERNAL



PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
2.0	SAGE2.0 ER16	SAGE2.0 EL16	16	3/8	.05	.07
3.0	SAGE3.0 ER22	SAGE3.0 EL22	22	1/2	.07	.11
4.0	SAGE4.0 ER22	SAGE4.0 EL22			.08	.13

### INTERNAL

PITCH MM	CATALOG NUMBER		DIMENSIONS			
	RIGHT HAND	LEFT HAND	L mm	I.C.	A	B
2.0	SAGE2.0 IR16	SAGE2.0 IL16	16	3/8	.05	.07
3.0	SAGE3.0 IR22	SAGE3.0 IL22	22	1/2	.07	.11
4.0	SAGE4.0 IR22	SAGE4.0 IL22			.08	.13

## API EXTERNAL

API SPEC 7 : 2001


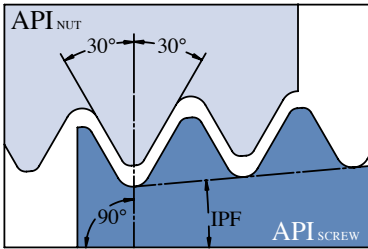


THREAD	PITCH TPI	TAPER IPF	CATALOG NUMBER RIGHT HAND	SIZE	DIMENSIONS			
					L mm	I.C.	A	B
V-0.040	5	3	API5 403 ER22	2 3/8" - 4 1/2" REG	22	1/2	.07	.10
V-0.038R	4	2	API4 382 ER22	NC23-NC50			.08	.10
V-0.038R	4	3	API4 383 ER22	NC56-NC77			.08	.10
V-0.050	4	2	API4 502 ER22	6 5/8" REG			.08	.11
V-0.050	4	3	API4 503 ER22	5 1/2" , 7 5/8" , 8 5/8" REG			.08	.11
V-0.040	5	3	API5 403 ER27	2 3/8" - 4 1/2" REG	27	5/8	.08	.11
V-0.038R	4	2	API4 382 ER27	NC23-NC50			.09	.11
V-0.038R	4	3	API4 383 ER27	NC56-NC77			.09	.11
V-0.050	4	2	API4 502 ER27	6 5/8" REG			.09	.12
V-0.050	4	3	API4 503 ER27	5 1/2" , 7 5/8" , 8 5/8" REG			.09	.12



## API INTERNAL



API SPEC 7 : 2001

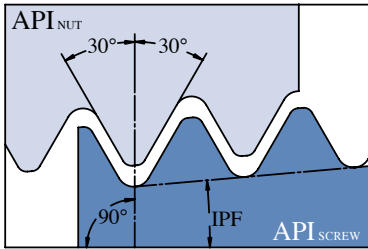

THREAD	PITCH TPI	TAPER IPF	CATALOG NUMBER RIGHT HAND	SIZE	DIMENSIONS			
					L mm	I.C.	A	B
V-0.040	5	3	API5 403 IR22	2 3/8" - 4 1/2" REG	22	1/2	.07	.10
V-0.038R	4	2	API4 382 IR22	NC23-NC50			.08	.10
V-0.038R	4	3	API4 383 IR22	NC56-NC77			.08	.10
V-0.050	4	2	API4 502 IR22	6 5/8" REG			.08	.11
V-0.050	4	3	API4 503 IR22	5 1/2" , 7 5/8" , 8 5/8" REG			.08	.11
V-0.040	5	3	API5 403 IR27	2 3/8" - 4 1/2" REG	27	5/8	.08	.11
V-0.038R	4	2	API4 382 IR27	NC23-NC50			.09	.11
V-0.038R	4	3	API4 383 IR27	NC56-NC77			.09	.11
V-0.050	4	2	API4 502 IR27	6 5/8" REG			.09	.12
V-0.050	4	3	API4 503 IR27	5 1/2" , 7 5/8" , 8 5/8" REG			.09	.12

## API ROUND

API SPEC 5B : 2008

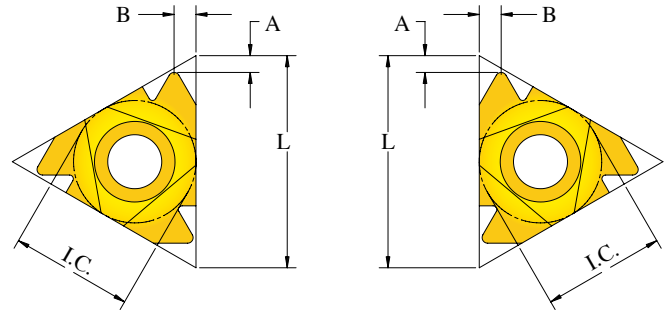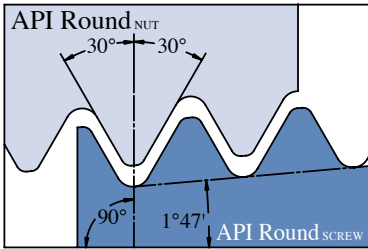

### EXTERNAL

PITCH TPI	TAPER IPF	CATALOG NUMBER RIGHT HAND	DIMENSIONS			
			L mm	I.C.	A	B
10	0.75	APIRD10 ER16	16	3/8	.05	.06
8		APIRD8 ER16			.05	.06

### INTERNAL



PITCH TPI	TAPER IPF	CATALOG NUMBER RIGHT HAND	DIMENSIONS			
			L mm	I.C.	A	B
10	0.75	APIRD10 IR16	16	3/8	.05	.06
8		APIRD8 IR16			.05	.06

### MULTITOOTH

PITCH TPI	TEETH	CATALOG NUMBER EXTERNAL		CATALOG NUMBER INTERNAL		DIMENSIONS			
		RIGHT HAND	ANVIL	RIGHT HAND	ANVIL	L mm	I.C.	A	B
10	2	APIRD10 2M ER22	ES22M	APIRD10 2M IR22	IS22M	22	1/2	.09	.14
10	3	APIRDI10 3M ER27	ES27M	APIRD10 3M IR27	IS27M	27	5/8	.14	.25
8	2	APIRDI8 2M ER27		APIRD8 2M IR27				.11	.18

## BUTTRESS CASING

API SPEC 5B : 2008

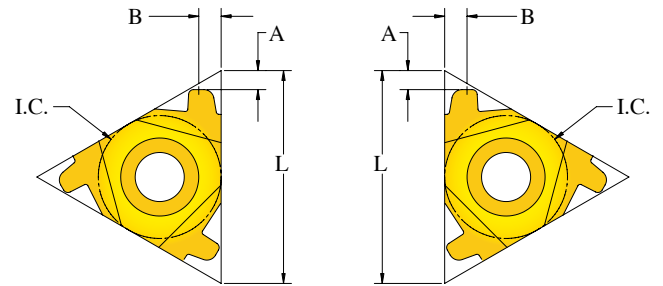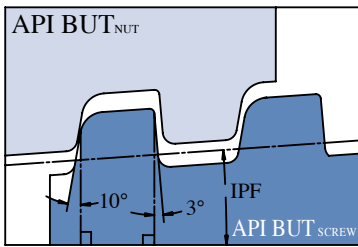

INTERNAL

EXTERNAL

### EXTERNAL



PITCH TPI	TAPER IPF	CATALOG NUMBER RIGHT HAND	SIZE	DIMENSIONS			
				L mm	I.C.	A	B
5	0.75	BUT575 ER22	4 1/2" – 13 3/8"	22	1/2	.09	.09
5	1.00	BUT510 ER22	16" - 20"			.09	.09

### INTERNAL

PITCH TPI	TAPER IPF	CATALOG NUMBER RIGHT HAND	SIZE	DIMENSIONS			
				L mm	I.C.	A	B
5	0.75	BUT575 IR22	4 1/2" – 13 3/8"	22	1/2	.09	.09
5	1.00	BUT510 IR22	16" - 20"			.09	.09

## EXTREME LINE CASING

API SPEC 5B : 2008

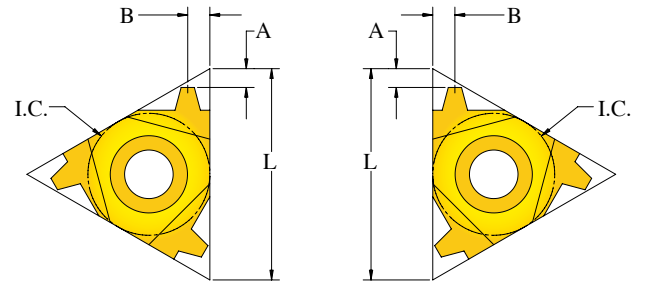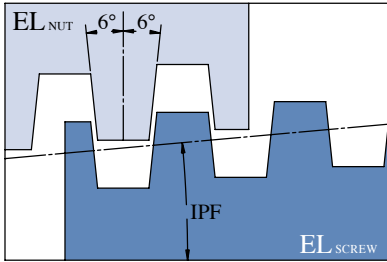

### EXTERNAL

PITCH TPI	TAPER IPF	CATALOG NUMBER RIGHT HAND	SIZE	DIMENSIONS			
				L mm	I.C.	A	B
6	1.5	EL615 ER22	5" - 7 5/8"	22	1/2	.08	.08
5	1.25	EL5125 ER22	8 5/8" - 10 3/4"			.09	.09

### INTERNAL

PITCH TPI	TAPER IPF	CATALOG NUMBER RIGHT HAND	SIZE	DIMENSIONS			
				L mm	I.C.	A	B
6	1.5	EL615 IR22	5" - 7 5/8"	22	1/2	.08	.08
5	1.25	EL5125 IR22	8 5/8" - 10 3/4"			.09	.09



## SPECIAL TOOLS

**we are able to manufacture custom tools as per your unique specifications**

In addition to our extensive line of standard threading and grooving tools, EROJET also manufactures special solid carbide, carbide tipped, High Speed Steel, and Stainless Steel cutting tools according to customer specifications. EROJET produces a wide range of special cutting tools for the automotive, electronics, aerospace, communications, and medical industries.





## FLAT GROOVING

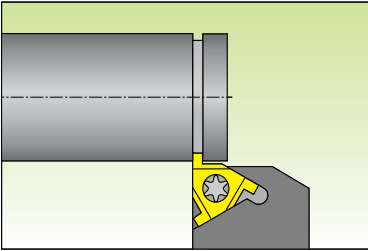

W±0.001	D	CATALOG NUMBER				DIMENSIONS	
		EXTERNAL RIGHT HAND	ANVIL	INTERNAL RIGHT HAND	ANVIL	L mm	I.C.
.020	.040			W.020 IR11		11	1/4
.031	.047			W.031 IR11			
.039	.059			W.039 IR11			
.031	.047	W.031 ER16	ES16-0	W.031 IR16	IS16-0	16	3/8
.039	.059	W.039 ER16	ES16-0	W.039 IR16	IS16-0		
.047	.074	W.047 ER16	ES16-0	W.047 IR16	IS16-0		
.055	.074	W.055 ER16	ES16-0	W.055 IR16	IS16-0		
.062	.078	W.062 ER16	ES16-0	W.062 IR16	IS16-0		
.067	.078	W.067 ER16	ES16-0	W.067 IR16	IS16-0		
.076	.078	W.076 ER16	ES16-0	W.076 IR16	IS16-0		
.088	.078	W.088 ER16	ES16-0	W.088 IR16	IS16-0		
.093	.072	W.093 ER16	ES16-0	W.093 IR16	IS16-0		

Recommended feed rate: .002-.004 inch /rev.  
Carbide grade available:K420C

## FULL RADIUS GROOVING

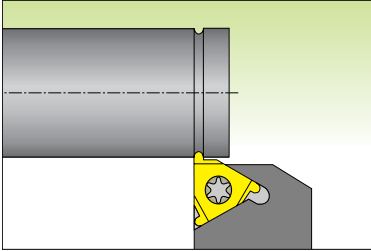

R±0.001	W	D	CATALOG NUMBER				DIMENSIONS	
			EXTERNAL RIGHT HAND	ANVIL	INTERNAL RIGHT HAND	ANVIL	L mm	I.C.
.020	.040	.059	R.020 ER16	ES16-0	R.020 IR16	IS16-0	16	3/8
.030	.060	.080	R.030 ER16	ES16-0	R.030 IR16	IS16-0		
.039	.078	.080	R.039 ER16	ES16-0	R.039 IR16	IS16-0		
.049	.098	.080	R.049 ER16	ES16-0	R.049 IR16	IS16-0		

Recommended feed rate: .002-.004 inch /rev.

Carbide grade available:K420C


## TOOLHOLDERS ORDERING CODE

HER	0750	K	16															
<b>HOLDER TYPE</b>	<b>SHANK</b>	<b>TOOL LENGTH</b>	<b>INSERT SIZE</b>	<b>V- VERTICAL</b>														
HER - EX. R.H HEL - EX. L.H HIR - IN. R.H HIL - IN. L.H	EXTERNAL TOOLHOLDERS SQUARE SHANK  .375 .50 .625 .75 1.0 1.25  INTERNAL TOOLHOLDERS ROUND SHANK  .375 .50 .625 .75 1.0 1.25 1.5	H - 4 K - 5 L - 5.5 M - 6 P - 7 R - 8 S - 10 T - 12	<table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th style="width: 50%;">L</th> <th style="width: 50%;">I.C.</th> </tr> </thead> <tbody> <tr> <td style="text-align: center;">06</td> <td style="text-align: center;">5/32</td> </tr> <tr> <td style="text-align: center;">08</td> <td style="text-align: center;">3/16</td> </tr> <tr> <td style="text-align: center;">11</td> <td style="text-align: center;">1/4</td> </tr> <tr> <td style="text-align: center;">16</td> <td style="text-align: center;">3/8</td> </tr> <tr> <td style="text-align: center;">22</td> <td style="text-align: center;">1/2</td> </tr> <tr> <td style="text-align: center;">27</td> <td style="text-align: center;">5/8</td> </tr> </tbody> </table>	L	I.C.	06	5/32	08	3/16	11	1/4	16	3/8	22	1/2	27	5/8	
L	I.C.																	
06	5/32																	
08	3/16																	
11	1/4																	
16	3/8																	
22	1/2																	
27	5/8																	






## EXTERNAL TOOLHOLDERS

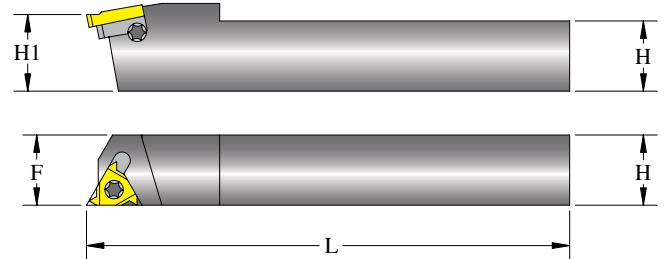

INSERT TYPE	CATALOG NUMBER	H=H1	F	L	SPARE PARTS				
					ANVIL R.H.	ANVIL L.H.	ANVIL SCREW	TORX KEY	INSERT SCREW
ER11	HER0310H11	.312	.312	4	-	-	-	KT8	SI11
	HER0375H11	.375	.375	4	-	-	-	KT8	SI11
ER16	HER0500H16	.50	.625	4	ES16	IS16	SA16	KT10	SI16
	HER0625H16	.625	.625	4	ES16	IS16	SA16	KT10	SI16
	HER0750K16	.75	.75	5	ES16	IS16	SA16	KT10	SI16
	HER1000M16	1.00	1.00	6	ES16	IS16	SA16	KT10	SI16
	HER1250P16	1.25	1.25	7	ES16	IS16	SA16	KT10	SI16
ER22	HER1000M22	1.00	1.00	6	ES22	IS22	SA22	KT20	SI22
	HER1250P22	1.25	1.25	7	ES22	IS22	SA22	KT20	SI22
ER27	HER1000M27	1.00	1.25	6	ES27	IS27	SA27	KT25	SI27
	HER1250P27	1.25	1.25	7	ES27	IS27	SA27	KT25	SI27


## VERTICAL TOOLHOLDERS

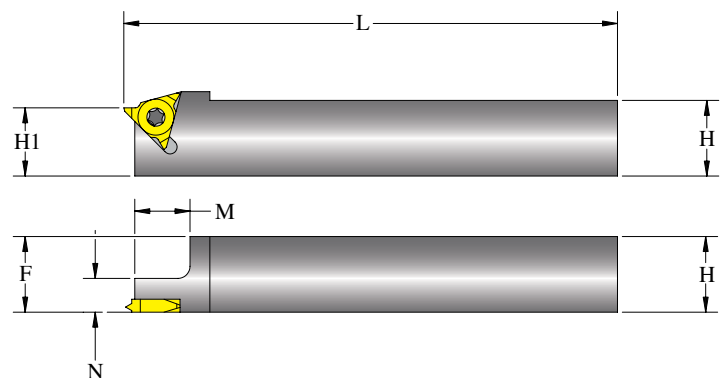

INSERT TYPE	CATALOG NUMBER	N	M	H=H1	F	L	SPARE PARTS	
							TORX KEY	INSERT SCREW
ER16V	HER0625H16V	.30	.60	.625	.625	4	KT10	SI16V
	HER0750K16V	.30	.60	.75	.75	5	KT10	SI16V
	HER1000M16V	.30	.60	1.00	1.00	6	KT10	SI16V

ALL TOOLHOLDERS ARE MADE WITH 1.5 HELIX ANGLE.  
FOR EX. L.H. INSERTS , CHANGE TO HEL INSTEAD OF HER.

## INTERNAL TOOLHOLDERS

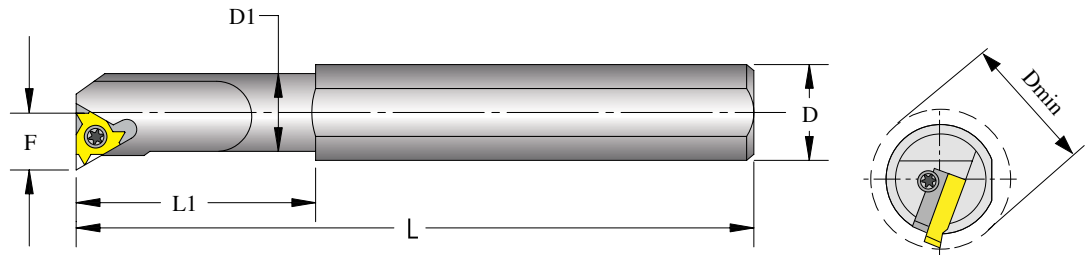

INSERT TYPE	CATALOG NUMBER	D	D1	Dmin	L	L1	F	SPARE PARTS				
								ANVIL R.H.	ANVIL L.H.	ANVIL SCREW	TORX KEY	INSERT SCREW
IR06	HIR0500H06	.500	.20	.25	4	.48	.18	-	-	-	KT6	SI06
IR08	HIR0625K08	.625	.26	.32	5	.67	.22	-	-	-	KT6	SI08
IR11	HIR0375H11	.375	.375	.49	4	-	.29	-	-	-	KT8	SI11
	HIR0375K11	.625	.375	.49	5	.98	.29	-	-	-	KT8	SI11
IR16	HIR0500M16	.625	.50	.65	6	1.26	.40	-	-	-	KT10	SI16T
	HIR0625P16	.750	.625	.77	7	1.56	.44	-	-	-	KT10	SI16T
	HIR0750P16	.750	.75	.89	7	-	.52	IS16	ES16	SA16	KT10	SI16
	HIR1000R16	1.000	1.00	1.12	8	-	.64	IS16	ES16	SA16	KT10	SI16
	HIR1250S16	1.250	1.25	1.41	10	-	.76	IS16	ES16	SA16	KT10	SI16
	HIR1500T16	1.500	1.50	1.64	12	-	.89	IS16	ES16	SA16	KT10	SI16
IR22	HIR0750P22	.750	.75	.95	7	-	.60	-	-	-	KT20	SI22T
	HIR1000R22	1.000	1.00	1.20	8	-	.72	IS22	ES22	SA22	KT20	SI22
	HIR1250S22	1.250	1.25	1.47	10	-	.84	IS22	ES22	SA22	KT20	SI22
	HIR1500T22	1.500	1.50	1.72	12	-	.97	IS22	ES22	SA22	KT20	SI22
IR27	HIR1250S27	1.250	1.25	1.53	10	-	.89	IS27	ES27	SA27	KT25	SI27
	HIR1500T27	1.500	1.50	1.78	12	-	1.02	IS27	ES27	SA27	KT25	SI27

ALL TOOLHOLDERS ARE MADE WITH 1.5 HELIX ANGLE.  
 FOR IN. L.H. TOOLHOLDERS, CHANGE TO HIL INSTEAD OF HIR.

## MACHINING CONDITIONS

ISO	MATERIAL	HARDNESS HB	COATED			UNCOATED
			K420C	K325C	K205C	K200
			CUTTING SPEED FT/MIN			
P	NON-ALLOY STEEL FREE MACHINING STEEL	130	390-650	350-590		
	LOW CARBON ALLOY STEEL	200	360-560	330-520		
	HIGH CARBON ALLOY STEEL	240	330-550	300-520	320-470	
	TOOL STEEL CAST STEEL	270	220-370	190-340	190-330	
	HEAT TREATED STEEL	400	160-290	160-290	160-290	
M	300 STAINLESS STEEL : ( 303,304,316 )	200	230-450	230-420		
	400 STAINLESS STEEL : (420, 440 )	240	260-390	260-370		
	17-4 PH, 15-5 PH, 13-8MO PH	400	160-360	160-330		
K	GREY CAST IRON	190	230-480	260-470		250-380
	NODULAR CAST IRON	180	320-440	290-410		280-410
	MALLEABLE CAST IRON	240	290-480	280-440		250-410
N	WROUGHT ALUMINUM: ( 2024, 6061, 7075...)	80	330-1300	330-1300		330-940
	CAST ALUMINUM :	90	480-1300	480-1300		330-770
	COPPER ALLOYS: BRASS, BRONZE, COPPER SILICON	100	250-580	250-580		190-470
	NON METALIC: Rubber, Polypropylene, Thermoplastics ( PVC ), Thermosetting Plastics ( FIBERGLASS ), Polyamides,		640-1600	640-1600		640-1600
S	TITANIUM :					
	PURE TITANIUM: 99.0Ti		330-460	330-460		220-390
	ALPHA ALLOYS:Ti 5Al2.5Sn		130-190	130-190		100-160
	BETA ALLOYS : Ti 13V11Cr3Al		100-160	100-160		80-130
	ALPHA-BETA ALLOYS : Ti 6Al4V		100-160	100-160		80-130
	COBALT BASE ALLOYS : STELLITE	350	60-130	60-130		60-100
	NIKEL BASE ALLOYS: INCONEL, HASTELLOY, WASPALLOY, KOVAR	300	60-130	60-120		60-130
	HIGH TEMPERATURE ALLOYS: IRON BASED : INCOLOY	270	100-190	100-190		
H	HARDENED STEEL	56 HRC	90-160	80-140	80-160	
	HARDENED CAST IRON	50 HRC	80-110	80-130	100-130	

## CARBIDE GRADES

**K420C** : AN ADVANCED PVD TiAlN COATED GRADE OVER A TOUGH WEAR-RESISTANT SUBMICRON SUBSTRATE FOR GENERAL PURPOSE MACHINING OF STEEL, STAINLESS STEEL, SUPERALLOYS.

**K325C** : SPECIAL MULTILAYER PVD COATING WITH A TOUGH, VERY FINE GRAIN SUBSTRATE, FOR MACHINING MOST STEEL, STAINLESS STEELS, CAST IRON, NON-FERROUS MATERIALS AND SUPER ALLOYS.

**K205C** : PVD TiAlN COATED OVER TOUGH SUBMICRON GRADE FOR MACHINING STEELS, HARDENED STEEL (30 HRc UP TO 56 HRc) AND HARDENED CAST IRON (50-55 HRc).


**K200** : UNCOATED GRADE , FOR MACHINING CAST IRON, NON-FERROUS MATERIALS ALUMINUM AND SUPER ALLOYS.

GRADES		P				M				K				N				S				H			
		P10	P20	P30	P40	M10	M20	M30	M40	K10	K20	K30	K40	N10	N20	N30	N40	S10	S20	S30	S40	H10	H20	H30	H40
COATED	K420C	○				○				○				○				○							
	K325C	○				○				○				○				○							
	K205C	○																○							
UNCOATED	K200									○				○				○							

## HELIX ANGLE ANVILS SELECTION



L	HOLDER TYPE	THREAD HELIX ANGLE							
		4.5	3.5	2.5	1.5	0.5	0	-0.5	-1.5
16	ER/IL	ES16+4.5	ES16+3.5	ES16+2.5	ES16	ES16+0.5	ES16-0	ES16-0.5	ES16-1.5
	IR/EL	IS16+4.5	IS16+3.5	IS16+2.5	IS16	IS16+0.5	IS16-0	IS16-0.5	IS16-1.5
22	ER/IL	ES22+4.5	ES22+3.5	ES22+2.5	ES22	ES22+0.5	ES22-0	ES22-0.5	ES22-1.5
	IR/EL	IS22+4.5	IS22+3.5	IS22+2.5	IS22	IS22+0.5	IS22-0	IS22-0.5	IS22-1.5
27	ER/IL	ES27+4.5	ES27+3.5	ES27+2.5	ES27	ES27+0.5	ES27-0	ES27-0.5	ES27-1.5
	IR/EL	IS27+4.5	IS27+3.5	IS27+2.5	IS27	IS27+0.5	IS27-0	IS27-0.5	IS27-1.5

## WORK METHODS

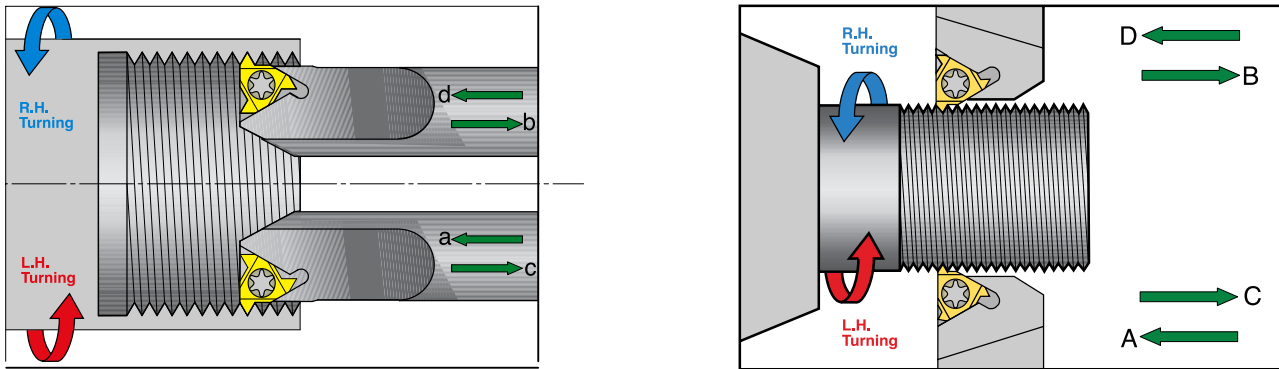

METHOD	THREAD TYPE	TURNING	INSERT & TOOLHOLDER TYPE
A, a	R.H.	R.H.	R.H.
B, b	R.H.	L.H.	L.H.
C, c	L.H.	R.H.	R.H.
D, d	L.H.	L.H.	L.H.

## THREAD HELIX ANGLE

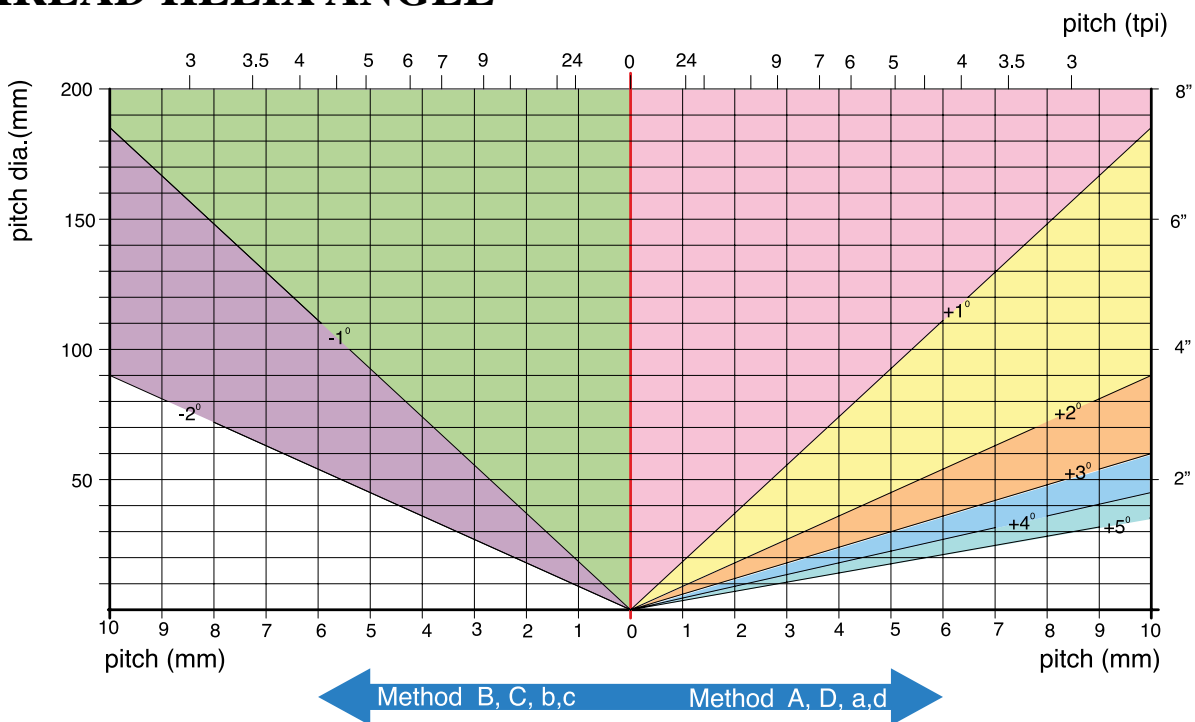

$$\operatorname{tg} \alpha = \frac{P}{\pi D}$$



All Standard Toolholders made with  $1 \frac{1}{2}^\circ$  helix angle. If the helix angle  $\alpha < 1^\circ$  or  $\alpha > 2^\circ$  then the anvil must change. In case of method B, C, b, c. The anvil must change to negative anvil.

## FLANK CLEARANCE ANGLE- $\gamma$

$$\gamma = \text{tg}^{-1} [\text{tg} \alpha \times \text{tg} \delta]$$

$\alpha = 10^\circ$  for external

$\alpha = 15^\circ$  for internal

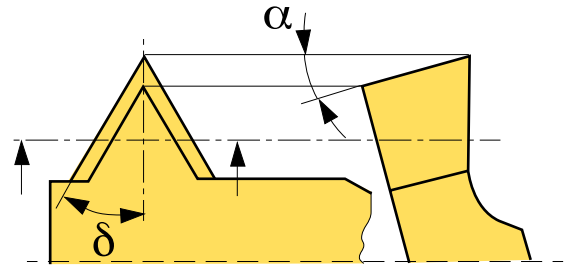

## TROUBLESHOOTING

PROBLEM	CAUSE	SOLUTION
<b>PLASTIC DEFORMATION</b>	WRONG CARBIDE GRADE INSUFFICIENT COOLANT CUTTING SPEED TOO HIGH CUTTING RESISTANCE HIGH	CHANGE GRADE CHECK COOLANT FLOW DECREASE CUTTING SPEED INCREASE THE NUMBER OF PASSES
<b>FRACTURE AND CHIPPING</b>	UNSTABLE CONDITIONS CUTTING SPEED TOO HIGH DEPTH OF CUT LARGE POOR CHIP CONTROL WRONG CARBIDE GRADE INCORRECT CENTER HIGH WRONG ANVIL	CHECK TOOL AND WORKPIECE CLAMPING AND STABILITY DECREASE CUTTING SPEED INCREASE THE NUMBER OF PASSES CHANGE TO FLANK FEED CHANGE GRADE CHECK CENTER HIGH CHECK HELIX ANGLE
<b>BUILT UP EDGE</b>	INCORRECT CUTTING SPEED WRONG CARBIDE GRADE INSUFFICIENT COOLANT	INCREASE CUTTING SPEED CHANGE GRADE INCREASE COOLANT FLOW
<b>VIBRATIONS</b>	CUTTING SPEED TOO HIGH INCORRECT TOOL AND WORKPIECE INSTALLATION LARGE DEPTH OF CUT	CHANGE CUTTING SPEED CHECK CENTER HIGH AND CLAMPING INCREASE NUMBER OF PASSES
<b>ASYMMETRIC WEAR OF THREAD FLANKS</b>	INCORRECT ANVIL	CALCULATE HELIX ANGLE AND SELECT AN APPROPRIATE ANVIL

## ISO METRIC EXTERNAL THREAD RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH ( MM )															
	6	5.5	5	4.5	4	3.5	3	2.5	2	1.75	1.5	1.25	1	0.75	0.5	0.35
1	.0177	.0169	.0165	.0154	.0134	.0134	.0106	.0102	.0094	.0091	.0091	.0079	.0075	.0067	.0043	.0039
2	.0146	.0142	.0146	.0130	.0118	.0122	.0091	.0087	.0091	.0083	.0083	.0071	.0063	.0059	.0035	.0031
3	.0130	.0122	.0122	.0114	.0098	.0094	.0079	.0079	.0075	.0063	.0071	.0055	.0051	.0043	.0031	.0024
4	.0110	.0106	.0110	.0098	.0083	.0079	.0071	.0067	.0067	.0055	.0063	.0047	.0039	.0024	.0024	
5	.0102	.0098	.0098	.0091	.0075	.0075	.0067	.0063	.0059	.0047	.0043	.0039	.0024			
6	.0094	.0091	.0091	.0079	.0071	.0067	.0063	.0055	.0047	.0039	.0024	.0024				
7	.0091	.0087	.0083	.0075	.0063	.0063	.0059	.0051	.0039	.0031						
8	.0087	.0079	.0079	.0071	.0059	.0059	.0051	.0047	.0024	.0024						
9	.0079	.0075	.0075	.0063	.0059	.0055	.0047	.0039								
10	.0075	.0071	.0071	.0059	.0055	.0047	.0043	.0024								
11	.0071	.0067	.0063	.0055	.0051	.0039	.0035									
12	.0067	.0063	.0055	.0047	.0047	.0024	.0024									
13	.0063	.0059	.0039	.0039	.0039											
14	.0055	.0047	.0024	.0024	.0024											
15	.0051	.0039														
16	.0039	.0024														
17	.0024															
18																
TOTAL	.1461	.1339	.1220	.1098	.0976	.0858	.0736	.0614	.0496	.0433	.0374	.0315	.0252	.0193	.0134	.0094

## ISO METRIC INTERNAL THREAD RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH ( MM )															
	6	5.5	5	4.5	4	3.5	3	2.5	2	1.75	1.5	1.25	1	0.75	0.5	0.35
1	.0173	.0169	.0165	.0142	.0126	.0126	.0098	.0098	.0091	.0087	.0087	.0075	.0071	.0063	.0039	.0035
2	.0142	.0134	.0146	.0126	.0106	.0114	.0087	.0083	.0083	.0079	.0079	.0063	.0059	.0055	.0035	.0031
3	.0126	.0114	.0110	.0110	.0087	.0091	.0075	.0075	.0071	.0059	.0067	.0051	.0047	.0039	.0028	.0024
4	.0106	.0094	.0102	.0098	.0079	.0075	.0067	.0063	.0063	.0051	.0059	.0043	.0039	.0024	.0024	
5	.0098	.0091	.0094	.0087	.0075	.0071	.0063	.0059	.0055	.0043	.0039	.0039	.0024			
6	.0091	.0087	.0083	.0075	.0071	.0063	.0063	.0051	.0043	.0035	.0024	.0024				
7	.0087	.0083	.0079	.0071	.0063	.0059	.0055	.0047	.0035	.0031						
8	.0083	.0079	.0075	.0067	.0059	.0055	.0047	.0043	.0024	.0024						
9	.0075	.0071	.0071	.0059	.0055	.0051	.0043	.0035								
10	.0067	.0063	.0063	.0055	.0055	.0043	.0039	.0024								
11	.0063	.0063	.0056	.0047	.0047	.0035	.0031									
12	.0059	.0059	.0047	.0039	.0039	.0024	.0024									
13	.0055	.0055	.0035	.0035	.0035											
14	.0051	.0043	.0024	.0024	.0024											
15	.0043	.0035														
16	.0035	.0024														
17	.0024															
18																
TOTAL	.1378	.1264	.1151	.1035	.0921	.0807	.0693	.0579	.0465	.0409	.0354	.0295	.0240	.0181	.0126	.0091

## UN EXTERNAL THREAD RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH																		
	TPI																		
	4	4.5	5	6	7	8	9	10	11	12	13	14	16	18	20	24	28	32	48
1	.0173	.0169	.0165	.0146	.0130	.0114	.0114	.0102	.0098	.0098	.0094	.0091	.0087	.0083	.0079	.0079	.0071	.0071	.0051
2	.0150	.0138	.0146	.0126	.0110	.0087	.0094	.0087	.0087	.0091	.0087	.0079	.0079	.0075	.0063	.0067	.0059	.0063	.0035
3	.0130	.0118	.0126	.0106	.0091	.0079	.0091	.0079	.0075	.0079	.0071	.0071	.0071	.0067	.0059	.0055	.0043	.0047	.0028
4	.0114	.0110	.0106	.0098	.0087	.0071	.0087	.0067	.0067	.0071	.0063	.0055	.0055	.0063	.0051	.0043	.0035	.0024	.0024
5	.0106	.0102	.0102	.0094	.0083	.0067	.0071	.0063	.0063	.0063	.0055	.0047	.0043	.0043	.0043	.0024	.0024		
6	.0102	.0091	.0094	.0071	.0075	.0063	.0063	.0059	.0059	.0055	.0051	.0043	.0035	.0024	.0024				
7	.0094	.0087	.0087	.0067	.0071	.0063	.0059	.0055	.0051	.0043	.0039	.0039	.0024						
8	.0091	.0083	.0079	.0063	.0059	.0059	.0047	.0047	.0047	.0024	.0024	.0024							
9	.0083	.0079	.0075	.0059	.0055	.0055	.0043	.0043	.0024										
10	.0079	.0075	.0071	.0051	.0055	.0055	.0024	.0024											
11	.0075	.0071	.0067	.0047	.0047	.0043													
12	.0071	.0067	.0055	.0039	.0024	.0024													
13	.0071	.0059	.0043	.0043															
14	.0067	.0055	.0024	.0024															
15	.0063	.0047																	
16	.0051	.0024																	
17	.0024																		
TOTAL	.1543	.1374	.1240	.1035	.0886	.0780	.0693	.0626	.0571	.0524	.0484	.0449	.0394	.0354	.0319	.0268	.0232	.0205	.0138

## UN INTERNAL THREAD RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH																		
	TPI																		
	4	4.5	5	6	7	8	9	10	11	12	13	14	16	18	20	24	28	32	48
1	.0169	.0169	.0165	.0134	.0122	.0114	.0114	.0098	.0094	.0094	.0091	.0087	.0083	.0079	.0075	.0075	.0067	.0067	.0047
2	.0134	.0138	.0146	.0110	.0106	.0087	.0091	.0083	.0079	.0083	.0083	.0079	.0075	.0071	.0063	.0063	.0055	.0059	.0035
3	.0126	.0114	.0110	.0102	.0087	.0075	.0079	.0075	.0071	.0075	.0067	.0067	.0067	.0063	.0055	.0051	.0039	.0043	.0028
4	.0110	.0094	.0102	.0087	.0079	.0067	.0079	.0063	.0063	.0067	.0059	.0051	.0051	.0059	.0043	.0039	.0031	.0024	.0024
5	.0102	.0091	.0094	.0083	.0075	.0063	.0063	.0059	.0059	.0059	.0051	.0043	.0039	.0035	.0039	.0024	.0024		
6	.0098	.0087	.0083	.0071	.0071	.0063	.0059	.0051	.0055	.0051	.0047	.0039	.0035	.0024	.0024				
7	.0091	.0083	.0079	.0067	.0063	.0055	.0055	.0047	.0047	.0039	.0035	.0035	.0024						
8	.0083	.0079	.0075	.0063	.0059	.0055	.0051	.0047	.0039	.0024	.0024	.0024							
9	.0079	.0075	.0071	.0059	.0055	.0051	.0043	.0043	.0024										
10	.0075	.0071	.0063	.0051	.0055	.0047	.0024	.0024											
11	.0071	.0067	.0063	.0047	.0039	.0031													
12	.0067	.0063	.0051	.0039	.0024	.0024													
13	.0063	.0055	.0039	.0035															
14	.0063	.0047	.0024	.0024															
15	.0055	.0039																	
16	.0047	.0024																	
17	.0024																		
TOTAL	.1457	.1295	.1165	.0972	.0835	.0732	.0657	.0591	.0531	.0492	.0457	.0425	.0374	.0331	.0299	.0252	.0217	.0193	.0134



**W (BSP, BSPT)**  
**EXTERNAL THREAD**  
**RECOMMENDED NO OF PASSES**

NO OF PASSES	PITCH																		
	TPI																		
	4	4.5	5	6	7	8	9	10	11	12	14	16	18	19	20	24	28	32	48
1	.0177	.0173	.0169	.0150	.0134	.0118	.0110	.0106	.0102	.0102	.0094	.0087	.0094	.0087	.0083	.0079	.0071	.0075	.0063
2	.0157	.0142	.0150	.0130	.0114	.0094	.0098	.0091	.0091	.0091	.0083	.0071	.0083	.0075	.0075	.0071	.0059	.0063	.0055
3	.0138	.0122	.0130	.0110	.0094	.0083	.0087	.0083	.0079	.0083	.0067	.0059	.0063	.0067	.0059	.0063	.0047	.0051	.0024
4	.0122	.0114	.0110	.0106	.0091	.0075	.0083	.0071	.0071	.0075	.0059	.0051	.0059	.0055	.0051	.0043	.0039	.0039	
5	.0110	.0106	.0106	.0098	.0087	.0071	.0079	.0067	.0067	.0067	.0055	.0047	.0043	.0043	.0039	.0024	.0024		
6	.0106	.0094	.0098	.0075	.0079	.0067	.0067	.0063	.0063	.0059	.0047	.0039	.0024	.0024	.0024				
7	.0098	.0091	.0091	.0071	.0075	.0067	.0067	.0055	.0051	.0047	.0039	.0035							
8	.0094	.0087	.0083	.0067	.0063	.0063	.0059	.0051	.0047	.0024	.0024	.0024							
9	.0087	.0083	.0079	.0063	.0059	.0055	.0051	.0043	.0024										
10	.0083	.0079	.0075	.0055	.0059	.0051	.0024	.0024											
11	.0079	.0075	.0071	.0047	.0047	.0043													
12	.0075	.0071	.0059	.0039	.0024	.0024													
13	.0071	.0063	.0047	.0043															
14	.0071	.0059	.0024	.0024															
15	.0067	.0051																	
16	.0051	.0024																	
17	.0024																		
TOTAL	.1610	.1433	.1291	.1079	.0925	.0811	.0724	.0654	.0594	.0547	.0469	.0413	.0366	.0350	.0331	.0280	.0240	.0213	.0142

**W (BSP, BSPT)**  
**INTERNAL THREAD**  
**RECOMMENDED NO OF PASSES**

NO OF PASSES	PITCH																		
	TPI																		
	4	4.5	5	6	7	8	9	10	11	12	14	16	18	19	20	24	28	32	48
1	.0177	.0173	.0169	.0150	.0134	.0118	.0110	.0106	.0102	.0102	.0094	.0087	.0094	.0087	.0083	.0079	.0071	.0075	.0063
2	.0157	.0142	.0150	.0130	.0114	.0094	.0098	.0091	.0091	.0091	.0083	.0071	.0083	.0075	.0075	.0071	.0059	.0063	.0055
3	.0138	.0122	.0130	.0110	.0094	.0083	.0087	.0083	.0079	.0083	.0067	.0059	.0063	.0067	.0059	.0063	.0047	.0051	.0024
4	.0122	.0114	.0110	.0106	.0091	.0075	.0083	.0071	.0071	.0075	.0059	.0051	.0059	.0055	.0051	.0043	.0039	.0024	
5	.0110	.0106	.0106	.0098	.0087	.0071	.0079	.0067	.0067	.0067	.0055	.0047	.0043	.0043	.0039	.0024	.0024		
6	.0106	.0094	.0098	.0075	.0079	.0067	.0067	.0063	.0063	.0059	.0047	.0039	.0024	.0024	.0024				
7	.0098	.0091	.0091	.0071	.0075	.0067	.0067	.0055	.0051	.0047	.0039	.0035							
8	.0094	.0087	.0083	.0067	.0063	.0063	.0059	.0051	.0047	.0024	.0024	.0024							
9	.0087	.0083	.0079	.0063	.0059	.0055	.0051	.0043	.0024										
10	.0083	.0079	.0075	.0055	.0059	.0051	.0024	.0024											
11	.0079	.0075	.0071	.0047	.0047	.0043													
12	.0075	.0071	.0059	.0039	.0024	.0024													
13	.0071	.0063	.0047	.0043															
14	.0071	.0059	.0024	.0024															
15	.0067	.0051																	
16	.0051	.0024																	
17	.0024																		
TOTAL	.1610	.1433	.1291	.1079	.0925	.0811	.0724	.0654	.0594	.0547	.0469	.0413	.0366	.0350	.0331	.0280	.0240	.0213	.0142

## NPT EXTERNAL & INTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH TPI				
	8	11.5	14	18	27
1	.0126	.0091	.0087	.0071	.0055
2	.0098	.0075	.0071	.0059	.0043
3	.0083	.0067	.0059	.0051	.0043
4	.0067	.0063	.0055	.0051	.0039
5	.0063	.0059	.0051	.0047	.0035
6	.0063	.0051	.0047	.0043	.0031
7	.0059	.0047	.0039	.0035	.0024
8	.0059	.0039	.0039	.0031	
9	.0055	.0039	.0035	.0024	
10	.0051	.0039	.0031		
11	.0051	.0035	.0024		
12	.0047	.0031			
13	.0047	.0024			
14	.0039				
15	.0031				
16	.0024				
<b>TOTAL</b>	<b>.0965</b>	<b>.0661</b>	<b>.0539</b>	<b>.0413</b>	<b>.0272</b>

## NPTF EXTERNAL & INTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH TPI				
	8	11.5	14	18	27
1	.0122	.0087	.0083	.0067	.0055
2	.0094	.0067	.0067	.0055	.0039
3	.0079	.0063	.0055	.0051	.0035
4	.0063	.0063	.0055	.0047	.0035
5	.0063	.0055	.0055	.0043	.0031
6	.0059	.0051	.0047	.0039	.0031
7	.0059	.0047	.0039	.0035	.0024
8	.0055	.0043	.0039	.0031	
9	.0055	.0039	.0035	.0024	
10	.0051	.0039	.0031		
11	.0051	.0035	.0024		
12	.0047	.0031			
13	.0047	.0024			
14	.0039				
15	.0031				
16	.0024				
<b>TOTAL</b>	<b>.0941</b>	<b>.0646</b>	<b>.0531</b>	<b>.0394</b>	<b>.0252</b>

## TR EXTERNAL & INTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH MM						
	7.0	6.0	5.0	4.0	3.0	2.0	1.5
1	.0150	.0142	.0134	.0126	.0122	.0118	.0094
2	.0134	.0126	.0118	.0110	.0102	.0102	.0087
3	.0110	.0110	.0098	.0091	.0091	.0087	.0067
4	.0102	.0098	.0091	.0079	.0075	.0071	.0055
5	.0098	.0094	.0087	.0075	.0075	.0063	.0047
6	.0091	.0091	.0083	.0071	.0071	.0047	.0024
7	.0087	.0087	.0075	.0067	.0059		
8	.0083	.0079	.0071	.0063	.0047		
9	.0079	.0075	.0067	.0059	.0043		
10	.0075	.0067	.0063	.0055	.0024		
11	.0075	.0063	.0055	.0047			
12	.0071	.0059	.0051	.0039			
13	.0071	.0051	.0047	.0024			
14	.0063	.0051	.0039				
15	.0063	.0047	.0024				
16	.0059	.0047					
17	.0059	.0043					
18	.0055	.0043					
19	.0047	.0024					
20	.0024						
TOTAL	.1594	.1398	.1102	.0906	.0709	.0512	.0374

## ACME EXTERNAL & INTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH TPI							
	4	5	6	8	10	12	14	16
1	.0142	.0134	.0122	.0106	.0102	.0102	.0098	.0094
2	.0126	.0118	.0114	.0091	.0091	.0087	.0083	.0087
3	.0110	.0098	.0098	.0075	.0079	.0071	.0071	.0071
4	.0098	.0091	.0083	.0071	.0075	.0063	.0059	.0059
5	.0094	.0087	.0071	.0067	.0063	.0055	.0051	.0047
6	.0091	.0083	.0067	.0063	.0055	.0047	.0039	.0024
7	.0087	.0075	.0063	.0059	.0047	.0039	.0024	
8	.0079	.0075	.0059	.0055	.0043	.0024		
9	.0075	.0071	.0059	.0047	.0039			
10	.0067	.0067	.0055	.0047	.0024			
11	.0059	.0059	.0051	.0039				
12	.0055	.0051	.0047	.0024				
13	.0051	.0047	.0039					
14	.0047	.0039	.0024					
15	.0043	.0024						
16	.0043							
17	.0039							
18	.0039							
19	.0024							
TOTAL	.1370	.1118	.0953	.0744	.0618	.0488	.0425	.0382

## STUB ACME EXTERNAL & INTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH TPI							
	4	5	6	8	10	12	14	16
1	.0122	.0118	.0106	.0091	.0091	.0087	.0083	.0071
2	.0102	.0102	.0091	.0075	.0067	.0067	.0071	.0063
3	.0083	.0083	.0079	.0063	.0055	.0055	.0059	.0051
4	.0075	.0071	.0063	.0059	.0051	.0047	.0047	.0047
5	.0067	.0063	.0059	.0051	.0047	.0039	.0024	.0024
6	.0067	.0059	.0055	.0047	.0043	.0024		
7	.0063	.0059	.0051	.0043	.0039			
8	.0059	.0051	.0047	.0039	.0024			
9	.0059	.0047	.0039	.0024				
10	.0055	.0039	.0024					
11	.0051	.0024						
12	.0043							
13	.0024							
TOTAL	.0870	.0717	.0614	.0492	.0417	.0319	.0283	.0256

## UNJ EXTERNAL THREAD RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH TPI												
	8	9	10	11	12	13	14	16	18	20	24	28	32
1	.0114	.0114	.0102	.0098	.0098	.0094	.0091	.0087	.0083	.0079	.0079	.0071	.0071
2	.0087	.0094	.0087	.0087	.0091	.0087	.0079	.0079	.0075	.0063	.0067	.0055	.0059
3	.0079	.0087	.0075	.0075	.0075	.0071	.0067	.0067	.0063	.0055	.0051	.0039	.0043
4	.0071	.0079	.0067	.0063	.0067	.0059	.0055	.0051	.0059	.0047	.0039	.0035	.0024
5	.0063	.0067	.0059	.0059	.0059	.0051	.0043	.0039	.0039	.0039	.0024		
6	.0063	.0063	.0055	.0055	.0051	.0047	.0039	.0035	.0024				
7	.0059	.0055	.0051	.0047	.0039	.0035	.0035	.0024					
8	.0055	.0047	.0043	.0043	.0024	.0024	.0024						
9	.0051	.0039	.0039	.0024									
10	.0047	.0024	.0024										
11	.0039												
12	.0024												
TOTAL	.0752	.0669	.0602	.0551	.0504	.0469	.0433	.0382	.0343	.0307	.0260	.0224	.0197

## UNJ INTERNAL THREAD RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH TPI												
	8	9	10	11	12	13	14	16	18	20	24	28	32
1	.0113	.0113	.0102	.0098	.0097	.0094	.0091	.0087	.0079	.0079	.0067	.0056	.0055
2	.0087	.0094	.0087	.0087	.0091	.0083	.0079	.0079	.0059	.0067	.0055	.0043	.0051
3	.0079	.0083	.0071	.0071	.0075	.0071	.0067	.0067	.0051	.0059	.0047	.0039	.0043
4	.0075	.0071	.0059	.0059	.0067	.0055	.0051	.0047	.0047	.0043	.0035	.0035	.0024
5	.0071	.0063	.0055	.0055	.0051	.0047	.0039	.0035	.0039	.0024	.0024	.0024	
6	.0063	.0055	.0051	.0047	.0039	.0039	.0035	.0024	.0024				
7	.0059	.0047	.0043	.0043	.0024	.0024	.0024						
8	.0055	.0039	.0039	.0024									
9	.0039	.0024	.0024										
10	.0024												
TOTAL	.0665	.0591	.0531	.0484	.0444	.0413	.0386	.0339	.0299	.0272	.0228	.0197	.0173

## MJ INTERNAL THREAD RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH MM					
	1.0	1.25	1.5	2.0	2.5	3.0
1	.0063	.0067	.0087	.0091	.0094	.0094
2	.0051	.0055	.0075	.0083	.0083	.0079
3	.0043	.0047	.0055	.0071	.0071	.0071
4	.0035	.0039	.0043	.0063	.0063	.0067
5	.0024	.0035	.0035	.0055	.0055	.0063
6		.0024	.0024	.0039	.0051	.0059
7				.0024	.0047	.0051
8					.0039	.0047
9					.0024	.0039
10						.0035
11						.0024
12						
TOTAL	.0217	.0268	.0319	.0425	.0528	.0630

## MJ EXTERNAL THREAD RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH MM					
	1.0	1.25	1.5	2.0	2.5	3.0
1	.0071	.0071	.0087	.0091	.0098	.0102
2	.0059	.0063	.0079	.0087	.0083	.0087
3	.0051	.0055	.0071	.0071	.0075	.0075
4	.0039	.0047	.0059	.0063	.0063	.0067
5	.0024	.0039	.0043	.0055	.0059	.0063
6		.0024	.0024	.0047	.0055	.0059
7				.0039	.0051	.0055
8				.0024	.0047	.0051
9					.0039	.0047
10					.0024	.0043
11						.0035
12						.0024
TOTAL	.0244	.0299	.0362	.0476	.0594	.0709

## RD (DIN 20400)

EXTERNAL & INTERNAL  
RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH MM			
	6.0	5.0	4.0	3.0
1	.0138	.0126	.0098	.0094
2	.0130	.0110	.0094	.0091
3	.0126	.0106	.0091	.0083
4	.0122	.0102	.0087	.0079
5	.0118	.0098	.0083	.0075
6	.0114	.0094	.0079	.0071
7	.0102	.0087	.0075	.0055
8	.0091	.0079	.0071	.0043
9	.0087	.0075	.0063	.0039
10	.0075	.0063	.0055	.0035
11	.0067	.0059	.0047	.0024
12	.0059	.0051	.0039	
13	.0047	.0047	.0024	
14	.0039	.0024		
15	.0024			
TOTAL	.1339	.1122	.0906	.0689

## RD (DIN 405)

EXTERNAL & INTERNAL  
RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH TPI			
	4	6	8	10
1	.0138	.0098	.0094	.0091
2	.0126	.0094	.0087	.0083
3	.0122	.0087	.0079	.0075
4	.0118	.0083	.0075	.0071
5	.0114	.0079	.0071	.0063
6	.0110	.0075	.0063	.0055
7	.0098	.0071	.0055	.0043
8	.0087	.0063	.0043	.0035
9	.0083	.0059	.0039	.0024
10	.0071	.0051	.0035	
11	.0063	.0047	.0024	
12	.0051	.0043		
13	.0047	.0024		
14	.0039			
15	.0024			
TOTAL	.1291	.0874	.0665	.0539

## PG

EXTERNAL & INTERNAL  
RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH TPI		
	20	18	16
1	.0067	.0071	.0075
2	.0059	.0055	.0063
3	.0055	.0047	.0051
4	.0039	.0039	.0043
5	.0024	.0035	.0039
6		.0024	.0035
7			.0024
TOTAL	.0244	.0272	.0307

## AMERICAN BUTTRESS EXTERNAL & INTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH TPI					
	6	8	10	12	16	20
1	.0110	.0098	.0087	.0083	.0079	.0071
2	.0094	.0087	.0079	.0075	.0071	.0063
3	.0083	.0075	.0075	.0071	.0067	.0055
4	.0079	.0075	.0067	.0063	.0055	.0051
5	.0079	.0067	.0063	.0059	.0051	.0047
6	.0075	.0063	.0059	.0055	.0047	.0039
7	.0075	.0063	.0051	.0051	.0039	.0024
8	.0071	.0059	.0047	.0047	.0024	
9	.0067	.0055	.0047	.0043		
10	.0063	.0051	.0043	.0024		
11	.0059	.0047	.0039			
12	.0055	.0043	.0024			
13	.0055	.0039				
14	.0051	.0024				
15	.0047					
16	.0039					
17	.0024					
<b>TOTAL</b>	<b>.1126</b>	<b>.0846</b>	<b>.0681</b>	<b>.0571</b>	<b>.0433</b>	<b>.0350</b>

## SAGENGWINDE ( DIN 513 ) EXTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH MM		
	4.0	3.0	2.0
1	.0126	.0118	.0114
2	.0118	.0110	.0102
3	.0106	.0102	.0094
4	.0098	.0094	.0075
5	.0091	.0087	.0071
6	.0083	.0083	.0067
7	.0079	.0079	.0059
8	.0075	.0071	.0055
9	.0071	.0067	.0043
10	.0067	.0059	.0024
11	.0063	.0055	
12	.0059	.0051	
13	.0059	.0043	
14	.0059	.0024	
15	.0055		
16	.0055		
17	.0051		
18	.0047		
19	.0024		
<b>TOTAL</b>	<b>.1386</b>	<b>.1043</b>	<b>.0705</b>

## SAGENGWINDE ( DIN 513 ) INTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	PITCH MM		
	4.0	3.0	2.0
1	.0126	.0122	.0114
2	.0118	.0114	.0106
3	.0106	.0106	.0098
4	.0094	.0094	.0083
5	.0091	.0091	.0071
6	.0083	.0087	.0063
7	.0079	.0079	.0047
8	.0075	.0075	.0024
9	.0071	.0063	
10	.0067	.0051	
11	.0063	.0024	
12	.0059		
13	.0055		
14	.0051		
15	.0039		
16	.0024		
<b>TOTAL</b>	<b>.1201</b>	<b>.0906</b>	<b>.0606</b>

## API EXTERNAL & INTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	V0.038R 4 TPI		V0.050 4 TPI		V0.040 5 TPI	BUTTRESS CASING 5 TPI	
	2 IPF	3 IPF	2 IPF	3 IPF	3 IPF	0.75 IPF	1.0 IPF
1	.0177	.0177	.0173	.0173	.0161	.0094	.0094
2	.0150	.0150	.0154	.0154	.0142	.0087	.0087
3	.0130	.0130	.0134	.0134	.0126	.0071	.0071
4	.0118	.0118	.0122	.0122	.0110	.0055	.0055
5	.0110	.0110	.0110	.0110	.0102	.0047	.0047
6	.0094	.0094	.0102	.0102	.0094	.0047	.0047
7	.0087	.0087	.0094	.0094	.0087	.0047	.0047
8	.0079	.0079	.0091	.0091	.0079	.0039	.0039
9	.0071	.0071	.0083	.0083	.0071	.0039	.0039
10	.0055	.0055	.0075	.0075	.0055	.0039	.0039
11	.0051	.0051	.0071	.0071	.0051	.0039	.0039
12	.0047	.0047	.0063	.0063	.0047	.0024	.0024
13	.0043	.0039	.0055	.0055	.0043		
14	.0024	.0024	.0051	.0051	.0024		
15			.0047	.0047			
16			.0039	.0043			
17			.0024	.0024			
<b>TOTAL</b>	.1236	.1232	.1492	.1488	.1193	.0630	.0630

## API EXTERNAL & INTERNAL RECOMMENDED NO OF PASSES

NO OF PASSES	EXTREME LINE CASING 6 TPI 1.5 IPF		EXTREME LINE CASING 5 TPI 1.25 IPF		API ROUND 0.75 IPF 8 TPI		API ROUND 0.75 IPF 10 TPI	
	EXTERNAL	INTERNAL	EXTERNAL	INTERNAL	EXTERNAL	INTERNAL	EXTERNAL	INTERNAL
1	.0091	.0098	.0098	.0098	.0098	.0098	.0098	.0098
2	.0079	.0079	.0087	.0091	.0087	.0087	.0079	.0079
3	.0063	.0067	.0079	.0083	.0079	.0079	.0067	.0067
4	.0059	.0059	.0071	.0075	.0071	.0071	.0059	.0059
5	.0051	.0055	.0059	.0063	.0063	.0063	.0055	.0055
6	.0047	.0051	.0055	.0059	.0059	.0059	.0051	.0051
7	.0043	.0047	.0051	.0055	.0055	.0055	.0047	.0047
8	.0039	.0047	.0047	.0051	.0051	.0051	.0047	.0047
9	.0024	.0039	.0043	.0047	.0047	.0047	.0039	.0039
10		.0024	.0039	.0043	.0043	.0043	.0024	.0024
11			.0039	.0043	.0043	.0043		
12			.0024	.0039	.0024	.0024		
13				.0024				
<b>TOTAL</b>	.0496	.0567	.0693	.0772	.0720	.0720	.0567	.0567

## MULTITOOTH INSERTS RECOMMENDED NO OF PASSES

STANDARD	PITCH	TEETH	CATALOG NUMBER	NO OF PASSES	DEPTH OF CUT PER PASS			
					1	2	3	4
ISO EXTERNAL	1.0	3	ISO1.0 3M ER16	2	.0145	.0102		
	1.5	2	ISO1.5 2M ER16	3	.0173	.0114	.0083	
	1.5	3	ISO1.5 3M ER22	2	.0220	.0145		
	2.0	2	ISO2.0 2M ER22	3	.0220	.0161	.0110	
	2.0	3	ISO2.0 3M ER22	2	.0303	.0189		
	2.5	2	ISO2.5 2M ER22	4	.0217	.0157	.0134	.0102
ISO INTERNAL	3.0	2	ISO3.0 2M ER27	4	.0236	.0205	.0157	.0126
	1.0	3	ISO1.0 3M IR16	2	.0134	.0094		
	1.5	2	ISO1.5 2M IR16	3	.0153	.0110	.0079	
	1.5	3	ISO1.5 3M IR22	2	.0205	.0138		
	2.0	2	ISO2.0 2M IR22	3	.0209	.0146	.0984	
	2.0	3	ISO2.0 3M IR22	2	.0283	.0169		
UN EXTERNAL	3.0	2	ISO3.0 2M IR27	4	.0236	.0177	.0146	.0114
	20	2	UN20 2M ER16	3	.0149	.0094	.0071	
	16	2	UN16 2M ER16	3	.0177	.0118	.0086	
	14	2	UN14 2M ER16	3	.0204	.0150	.0094	
	16	3	UN16 3M ER22	2	.0224	.0157		
	12	2	UN12 2M ER22	3	.0228	.0161	.0122	
UN INTERNAL	12	3	UN12 3M ER22	2	.0311	.0200		
	8	2	UN8 2M ER27	4	.0252	.0209	.0173	.0137
	20	2	UN20 2M IR16	3	.0138	.0944	.0071	
	16	2	UN16 2M IR16	3	.0173	.0106	.0827	
	14	2	UN14 2M IR16	3	.0185	.0141	.0098	
	12	2	UN12 2M IR16	3	.0212	.0149	.0118	
W EXTERNAL	16	3	UN16 3M IR22	2	.0212	.0150		
	12	2	UN12 2M IR22	3	.0212	.0150	.0118	
	12	3	UN12 3M IR22	2	.0287	.0193		
	8	2	UN8 2M IR27	4	.0255	.0193	.0154	.0120
	14	2	W14 2M ER16	3	.0212	.0137	.0106	
	14	3	W14 3M ER22	2	.0272	.0185		
W INTERNAL	11	2	W11 2M ER22	3	.0259	.0188	.0133	
	14	2	W14 2M IR16	3	.0212	.0137	.0106	
	14	3	W14 3M IR22	2	.0271	.0185		
NPT EXTERNAL	11	2	W11 2M IR22	3	.0260	.0188	.0133	
	11.5	2	NPT11.5 2M ER22	4	.0209	.0185	.0150	.0118
	11.5	3	NPT11.5 3M ER27	3	.0303	.0212	.0145	
NPT INTERNAL	8	2	NPT8 2M ER27	4	.0322	.0236	.0212	.0177
	11.5	2	NPT11.5 2M IR22	4	.0209	.0185	.0150	.0118
	11.5	3	NPT11.5 3M IR27	3	.0303	.0212	.0146	
NPTF EXTERNAL	8	2	NPT8 2M IR27	4	.0322	.0236	.0212	.0177
NPTF INTERNAL	11.5	2	NPTF11.5 2M ER22	4	.0204	.0181	.0150	.0118
API ROUND EXTERNAL	11.5	2	NPTF11.5 2M IR22	4	.0204	.0181	.0150	.0118
	10	2	APIRD10 2M ER22	3	.0240	.0193	.0122	
	10	3	APIRD10 3M ER27	2	.0389	.0165		
API ROUND INTERNAL	8	2	APIRD8 2M ER27	3	.0322	.0232	.0157	
	10	2	APIRD10 2M IR22	3	.0240	.0193	.0122	
	10	3	APIRD10 3M IR27	2	.0389	.0165		
	8	2	APIRD8 2M IR27	3	.0322	.0232	.0157	



## TAPER PIPE THREAD :NPT

ANSI/ASME B 1.20.1-1983

INTERNAL THREAD

American National Standard Taper Pipe Threads

THREAD SIZE	PITCH TPI	PITCH	PROFILE DEPTH	RECOMMENDED TOOLS	
				INSERT	TOOLHOLDER
NPT 1/16	27	.0370	.0271	NPT27 IR06	HIR0500H06
NPT 1/8	27	.0370	.0271	NPT27 IR08	HIR0625K08
NPT 1/4	18	.0555	.0413	NPT18 IR08	HIR0625K08
NPT 3/8	18	.0555	.0413	NPT18 IR11	HIR0375K11
NPT 1/2	14	.0714	.0539	NPT14 IR16	HIR0500M16
NPT 3/4	14	.0714	.0539	NPT14 IR16	HIR0625P16
NPT 1	11.5	.0870	.0661	NPT11.5 IR16	HIR0750P16
NPT 1 1/4	11.5	.0870	.0661	NPT11.5 IR16	HIR1000R16
NPT 1 1/2	11.5	.0870	.0661	NPT11.5 IR16	HIR1250S16
NPT 2	11.5	.0870	.0661	NPT11.5 IR16	HIR1250S16
NPT 2 1/2	8	.1250	.0964	NPT8 IR16	HIR1500T16
NPT 3	8	.1250	.0964	NPT8 IR16	HIR1500T16
NPT 3 1/2	8	.1250	.0964	NPT8 IR16	HIR1500T16
NPT 4	8	.1250	.0964	NPT8 IR16	HIR1500T16
NPT 5	8	.1250	.0964	NPT8 IR16	HIR1500T16

## TAPER PIPE THREAD :NPTF

ANSI B 1.20.3-1976

INTERNAL THREAD

American National Standard Dryseal Pipe Threads

THREAD SIZE	PITCH TPI	PITCH	PROFILE DEPTH	RECOMMENDED TOOLS	
				INSERT	TOOLHOLDER
NPTF 1/16	27	.0370	.0252	NPTF27 IR06	HIR0500H06
NPTF 1/8	27	.0370	.0252	NPTF27 IR08	HIR0625K08
NPTF 1/4	18	.0555	.0394	NPTF18 IR08	HIR0625K08
NPTF 3/8	18	.0555	.0394	NPTF18 IR11	HIR0375K11
NPTF 1/2	14	.0714	.0531	NPTF14 IR16	HIR0500M16
NPTF 3/4	14	.0714	.0531	NPTF14 IR16	HIR0625P16
NPTF 1	11.5	.0870	.0646	NPTF11.5 IR16	HIR0750P16
NPTF 1 1/4	11.5	.0870	.0646	NPTF11.5 IR16	HIR1000R16
NPTF 1 1/2	11.5	.0870	.0646	NPTF11.5 IR16	HIR1250S16
NPTF 2	11.5	.0870	.0646	NPTF11.5 IR16	HIR1250S16
NPTF 2 1/2	8	.1250	.0941	NPTF8 IR16	HIR1500T16
NPTF 3	8	.1250	.0941	NPTF8 IR16	HIR1500T16

## PARALLEL PIPE THREADS

BSP (G)

INTERNAL THREAD

THREAD SIZE	PITCH TPI	PITCH	PROFILE DEPTH	BORE DIAMETER	RECOMMENDED TOOLS	
					INSERT	TOOLHOLDER
G1/16	28	.0357	.0228	.258	W28 IR06	HIR0500H06
G1/8	28	.0357	.0228	.337	W28 IR08	HIR0625K08
G1/4	19	.0526	.0337	.451	W19 IR08	HIR0625K08
G3/8	19	.0526	.0337	.589	W19 IR11	HIR0375K11
G1/2	14	.0714	.0457	.733	W14 IR16	HIR0500M16
G5/8	14	.0714	.0457	.810	W14 IR16	HIR0625P16
G3/4	14	.0714	.0457	.949	W14 IR16	HIR0625P16
G7/8	14	.0714	.0457	1.097	W14 IR16	HIR0750P16
G1	11	.0909	.0582	1.192	W11 IR16	HIR0750P16
G1 1/8	11	.0909	.0582	1.375	W11 IR16	HIR1000R16
G1 1/4	11	.0909	.0582	1.533	W11 IR16	HIR1000R16
G1 1/2	11	.0909	.0582	1.765	W11 IR16	HIR1250S16
G1 3/4	11	.0909	.0582	2.000	W11 IR16	HIR1250S16
G2	11	.0909	.0582	2.230	W11 IR16	HIR1250S16


## TAPER PIPE THREADS

BSPT (Rc)

INTERNAL THREAD

THREAD SIZE	PITCH TPI	PITCH	PROFILE DEPTH	BORE DIAMETER	RECOMMENDED TOOLS	
					INSERT	TOOLHOLDER
Rc 1/16	28	.0357	.0228	.258	BSPT28 IR06	HIR0500H06
Rc 1/8	28	.0357	.0228	.337	BSPT28 IR08	HIR0625K08
Rc 1/4	19	.0526	.0337	.451	BSPT19 IR08	HIR0625K08
Rc 3/8	19	.0526	.0337	.589	BSPT19 IR11	HIR0375K11
Rc 1/2	14	.0714	.0457	.733	BSPT14 IR16	HIR0500M16
Rc 5/8	14	.0714	.0457	.810	BSPT14 IR16	HIR0625P16
Rc 3/4	14	.0714	.0457	.949	BSPT14 IR16	HIR0625P16
Rc 7/8	14	.0714	.0457	1.097	BSPT14 IR16	HIR0750P16
Rc 1	11	.0909	.0582	1.192	BSPT11 IR16	HIR0750P16
Rc 1 1/8	11	.0909	.0582	1.375	BSPT11 IR16	HIR1000R16
Rc 1 1/4	11	.0909	.0582	1.533	BSPT11 IR16	HIR1000R16
Rc 1 1/2	11	.0909	.0582	1.765	BSPT11 IR16	HIR1250S16
Rc 1 3/4	11	.0909	.0582	2.000	BSPT11 IR16	HIR1250S16
Rc 2	11	.0909	.0582	2.230	BSPT11 IR16	HIR1250S16



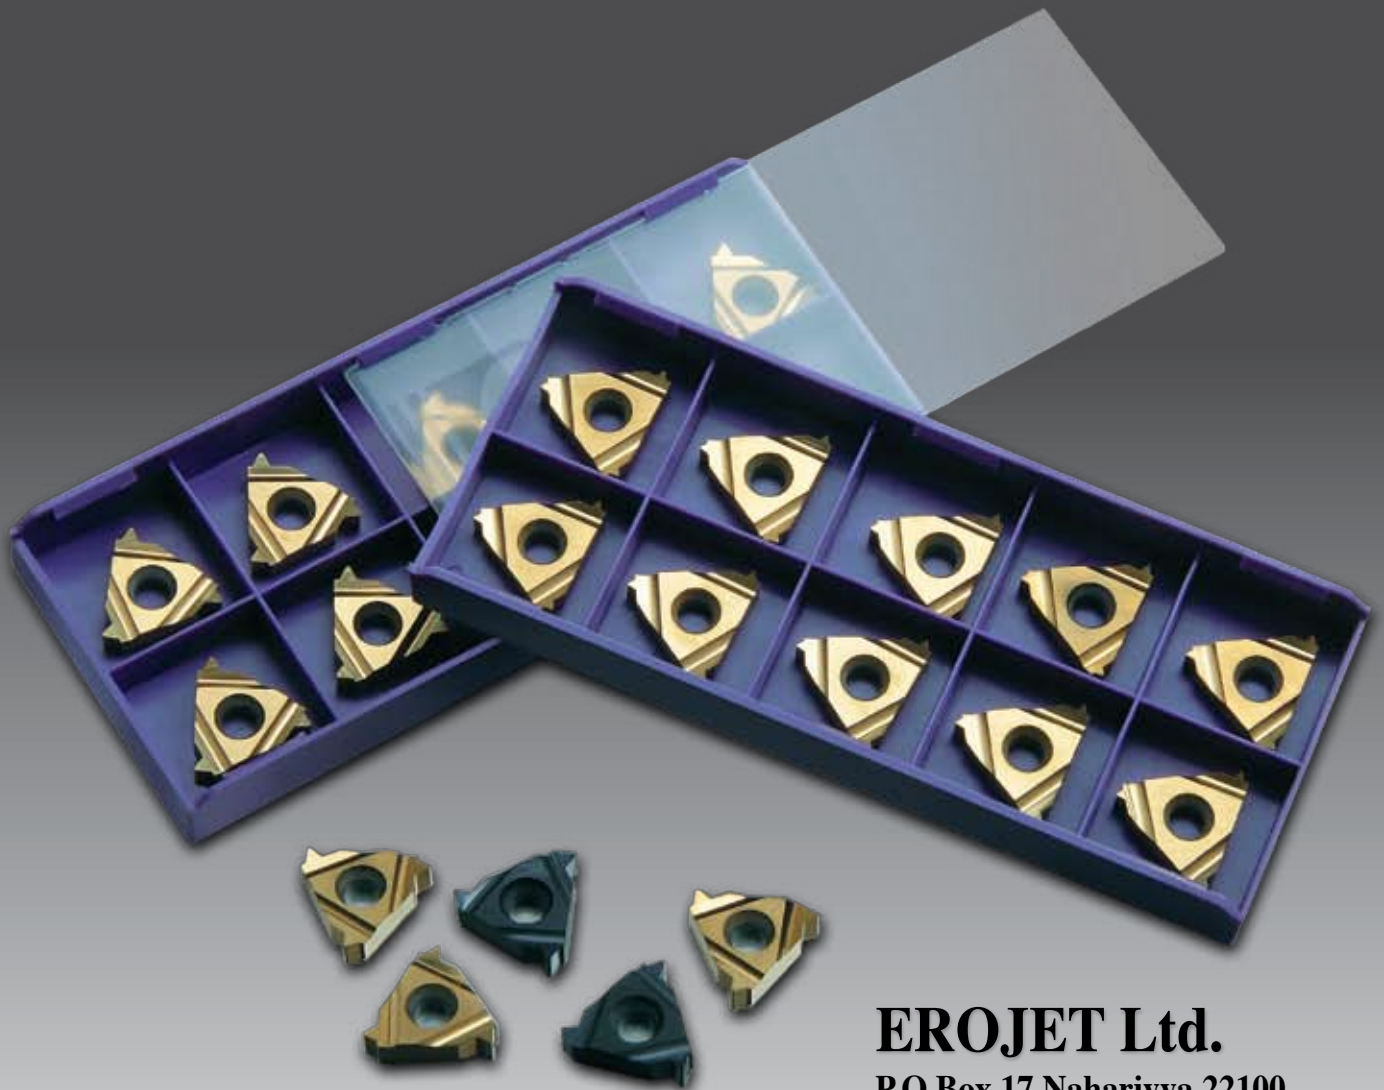

## **EROJET Ltd.**

**P.O.Box 17 Nahariyya 22100  
ISRAEL**

**Tel: 972-49990026**

**Fax:972-49990027**

**E-mail: [sales@erojet-tools.com](mailto:sales@erojet-tools.com)**

**[WWW.EROJET-TOOLS.COM](http://WWW.EROJET-TOOLS.COM)**